





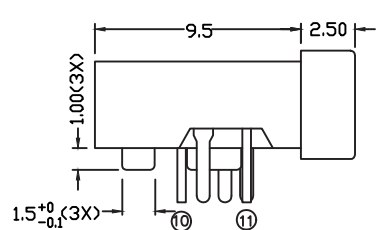

PCB LAYOUT
<BOTTOM VIEW>

Technical Parameters:

Rated Voltage:DC 30V

Rated Current: 0.5 A

Contact Resistance:0.03Ω,Max

Insulation Resistance:100MΩ,Min

Pressure:AC500V(50Hz)/1minute

Insertion Force:2-20 N

Life: 50000 Times

Operating Temperature:-30℃~70℃

Material:

Terminal1:Brass

Terminal2:Copper Alloy

Terminal3:Copper Alloy


Terminal10:Copper Alloy

Terminal11:Copper Alloy

Bushing:PA66

Housing:PA66

Cover:PA66



Ø2.5 MATE PLUG

MODEL NO.	007A	007AA	007AB	007AC	007AD	007AE
SCHEMATIC						

ORDER INFORMATION

RHTAY20SJ2.5-007AA

2.5mm Dip Stereo Jack

Schematic See Annex

NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

Dip Stereo Jack

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



RHTAY20SJ2.5-007A