


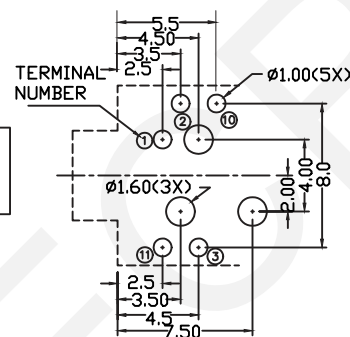

PCB LAYDUT
<BOTTOM VIEW>

Technical Parameters:

Rated Voltage:DC 30V

Rated Current: 0.5 A

Contact Resistance:0.03Ω,Max

Insulation Resistance:100M Ω ,Min

Pressure:AC500V(50Hz)/1minute

Insertion Force: 2-20 N

Life: 50000 Times

Operating Temperature:-30℃~70℃

Material:

Housing Material/Bushing/Cover: PA66

Center Pin Material:


Terminal1:Brass

Temminal2:Copper Alloy

Terminal3:Copper Alloy

Terminal10:Copper Alloy

Terminal11:Copper Alloy



Ø2.5 MATE PLUG

MODEL NO.	007B	007BA	007BB	007AC	007BD	007BE
SCHEMATIC						

ORDERINFORMATION

RHTAY20SJ2.5-007BA

2.5mm Dip Stereo Jack

Schematic See Annex__



 NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

Dip Stereo Jack


0~3

3~18 18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION



RHTAY20SJ2.5-007B