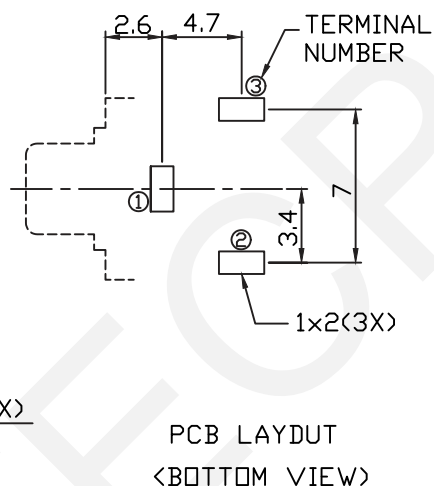
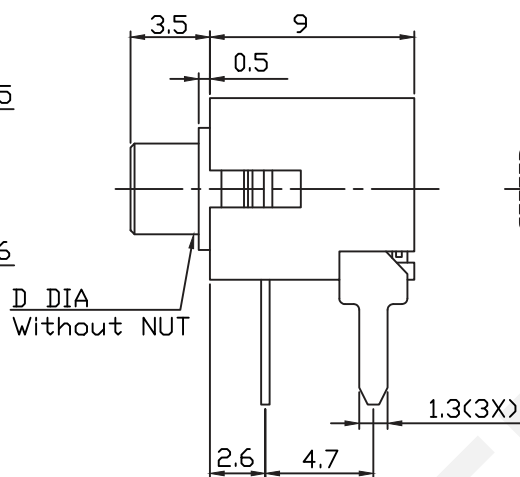
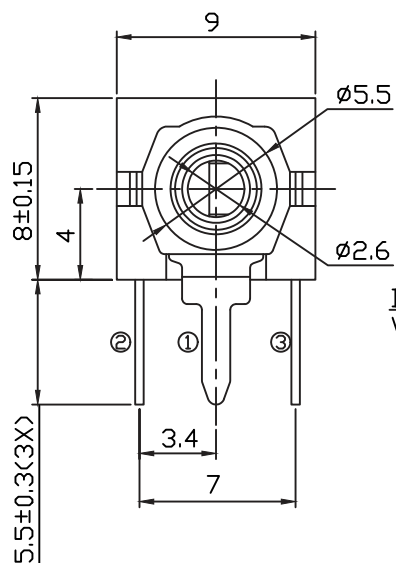


|           |      |
|-----------|------|
| MODEL NO. | 002B |
| D DIA     | Ø4   |
| SCHEMATIC |      |

#### Technical Parameters:

Rated Voltage:DC 30V

Rated Current: 0.5 A

Contact Resistance:0.03Ω,Max

Insulation Resistance:100MΩ,Min

Pressure:AC500V(50Hz)/1minute

Insertion Force:2-20 N

Life: 50000 Times

Operating Temperature:-30℃~70℃

Material:

Housing Material:PBT

Center Pin Material:

Terminal1:Brass

Terminal2:Copper Alloy

Terminal3:Brass

Bushing :Brass

#### ORDER INFORMATION

RHTAYG2.5-002B

2.5mm Mono Jack Type

A: With NUT

B: Without NUT

**RHTECP** NINGBO RHT ELECTRONIC CO.,LTD


| UNITS:mm | SHEET SIZE: A4 | SCALE:--- | DRWN BY PAN |
|----------|----------------|-----------|-------------|
| 0~3      | 3~18           | 18~50     | 50~120      |
| ±0.12    | ±0.15          | ±0.3      | ±0.5        |

CHK'D BY FENG

APPR BY ZHAN

Dip Mono Jack

THIRD ANGLE PROJECTION



RHTAYG2.5-002B