
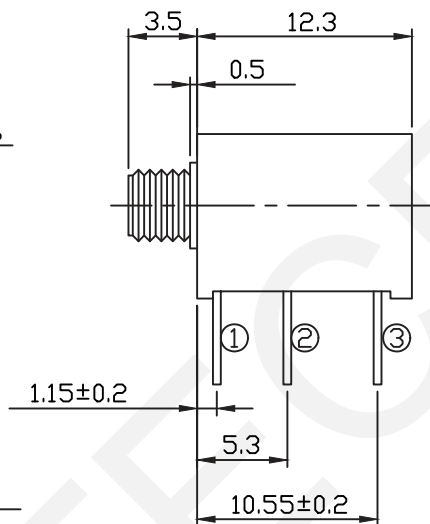
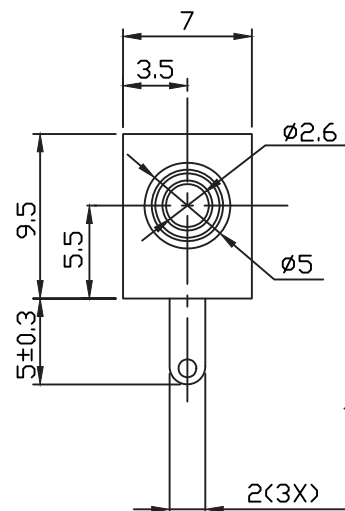



PCB LAYDUT
<BOTTOM VIEW>

TERMINAL
NUMBER

MODEL NO.	003A
D DIA	M4×0.5
SCHEMATIC	



2.5 MATE PLUG

Technical Parameters:

Rated Voltage:DC 30V

Rated Current: 0.5 A

Contact Resistance:0.03Ω,Max

Insulation Resistance:100MΩ,Min

Pressure:AC500V(50Hz)/1minute

Insertion Force:2~20 N

Life: 50000 Times

Operating Temperature:-30℃~70℃

Material:

Housing Material:PBT

Center Pin Material:

Terminal1:Brass

Terminal2:Copper Alloy

Terminal3:Brass

Bushing :Brass

ORDER INFORMATION

RHTAYG2.5-003A

2.5mm Mono Jack Type-

A: With NUT

B: Without NUT

NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

Dip Mono Jack

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION



RHTAYG2.5-003A

±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN