

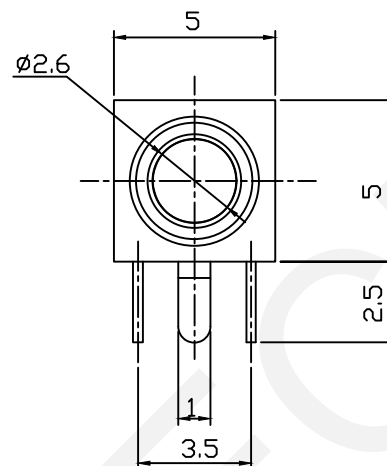
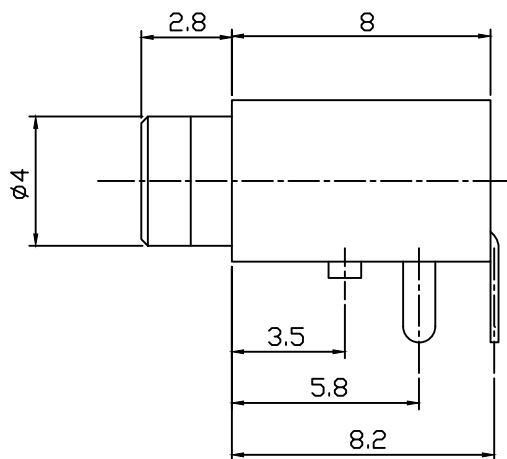


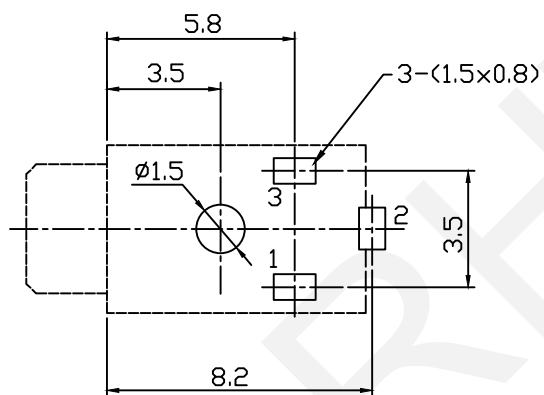

SCHEMATIC



PCB LAYOUT

Material:
Housing: PA66
Contact: Phosphor Bronze,
Ag Plating/Cu-Sn-Plating
AXIS Support: Ni-Plating
Electric:
Rating: DC 30V 0.5A
Contact Resistance: 0.03Ω Max
Insulation Resistance: 100MΩ Min (DC 250V)
Withstand Voltage: 500V AC
Insertion And Extraction Force: 3-20N
Life Test: 5000 Cycles

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE: ---

DRWN BY PAN

2.5mm Phone Jack

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



RHTAYG2.5-006B