

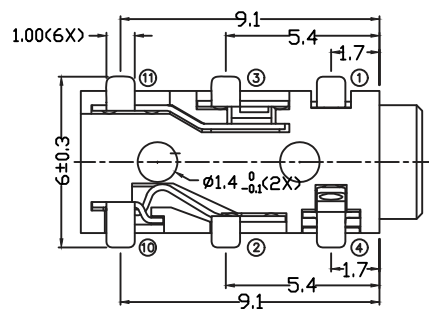
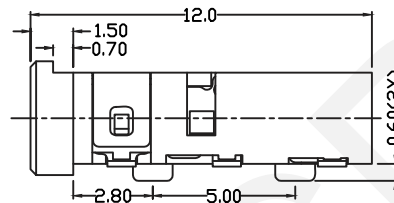

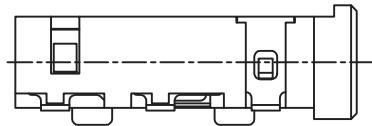


A DETAIL COPLANARITY



Ø2.5 MATE PLUG

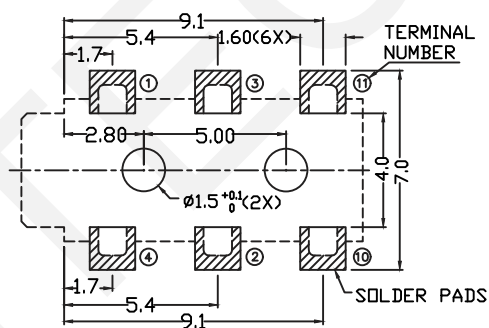

PCB LAYOUT  
<BOTTOM VIEW>

Technical parameters:

Rated voltage: DC 30 V

Rated current: 0.5 A

Contact resistance: 0.03Ω, max

Insulation resistance: 100MΩ, min

Pressure: AC500V (50Hz) / 1minute

Insertion Force :2-20 N

Life: 50000 times

Operating Temperature:-30°C~70°C

Material:

Housing/Cover :Pa66

Terminal 1 : Copper Alloy

Terminal 2 : Copper Alloy

Terminal 3 : Copper Alloy

Terminal 4 : Copper Alloy

Terminal10 : Brass

Terminal11 : Brass

ORDER INFORMATION

RHTAYPJ2.5-003A

2.5 SMD Stereo Jack Type

Schematic: See Annex

| MODEL NO. | RHTAYPJ2.5-003 | RHTAYPJ2.5-003A | RHTAYPJ2.5-003B | RHTAYPJ2.5-003C |
|-----------|----------------|-----------------|-----------------|-----------------|
| SCHEMATIC |                |                 |                 |                 |

NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

SMD Stereo Jack

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION



RHTAYPJ2.5-003

±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN