
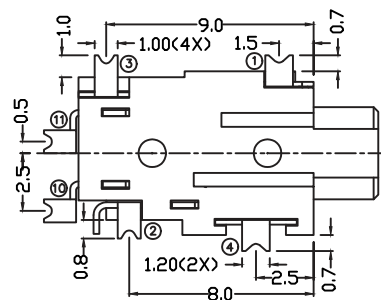
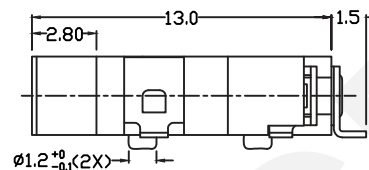




Ø2.5 MATE PLUG

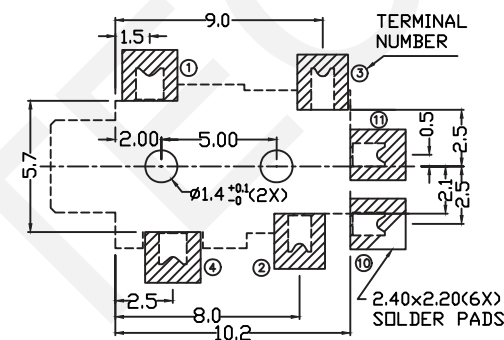

RECOMMENDED  
SOLDER PAD LAYOUT

Technical parameters:

Rated voltage: DC 30 V

Rated current: 0.5 A

Contact resistance: 0.03Ω, max

Insulation resistance: 100MΩ, min

Pressure: AC500V (50Hz) / 1minute

Insertion Force: 12-20 N

Life: 50000 times

Operating Temperature: -30°C~70°C

Material:

Terminal 1 : Copper Alloy

Terminal 2 : Copper Alloy

Terminal 3 : Copper Alloy

Terminal 4 : Copper Alloy

Terminal10 : Brass

Terminal11 : Brass

Housing :Pa6T

| MODEL NO. | RHTAYPJ2.5-004 | RHTAYPJ2.5-004A | RHTAYPJ2.5-004B | RHTAYPJ2.5-004C | RHTAYPJ2.5-004D |
|-----------|----------------|-----------------|-----------------|-----------------|-----------------|
| SCHEMATIC |                |                 |                 |                 |                 |

ORDER INFORMATION

RHTAYPJ2.5-004A

2.5 SMD Stereo Jack

Schematic: See Annex

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

SMD Stereo Jack

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



RHTAYPJ2.5-004