

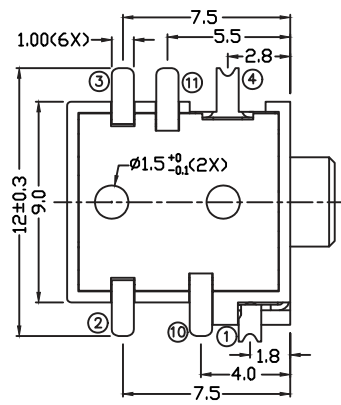

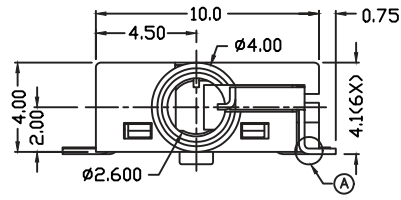



A DETAIL COPLANARITY



ø2.5 MATE PLUG

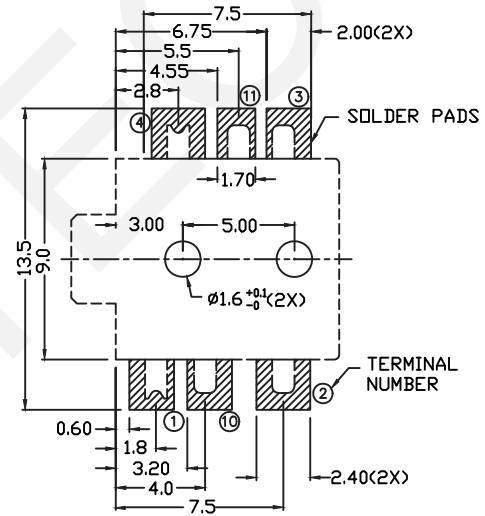

RECOMMENDED
SOLDER PAD LAYOUT

Technical parameters:
 Rated voltage: DC 30 V
 Rated current: 0.5 A
 Contact resistance: 0.03Ω, max
 Insulation resistance: 100MΩ, min
 Pressure: AC500V (50Hz) / 1minute
 Insertion Force :2-20 N
 Life: 50000 times
 Operating Temperature:-30°C~70°C
 Material:
 Terminal 1 : Copper Alloy
 Terminal 2 : Copper Alloy
 Terminal 3 : Copper Alloy
 Terminal 4 : Copper Alloy
 Terminal10 : Brass
 Terminal11 : Brass
 Housing :Pa6T
 Cover :Pa6T

ORDERINFORMATION
 RHTAYPJ2.5-006A

2.5 SMD Stereo Jack
 Schematic: See Annex

MODEL NO.	RHTAYPJ2.5-006	RHTAYPJ2.5-006A	RHTAYPJ2.5-006B	RHTAYPJ2.5-006C
SCHEMATIC				

RHTECP® NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5

CHK'D BY FENG
 APPR BY ZHAN

SMD Stereo Jack
THIRD ANGLE PROJECTION
RHTAYPJ2.5-006