


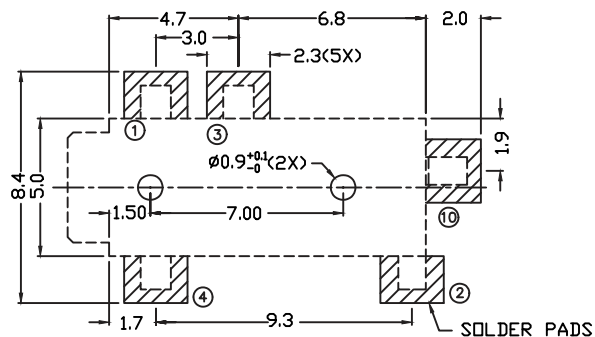
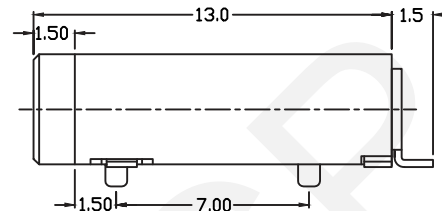



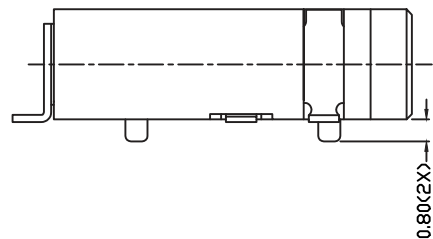


RECOMMENDED
SOLDER PAD LAYOUT



A DETAIL COPLANARITY



2.5 MATE PLUG

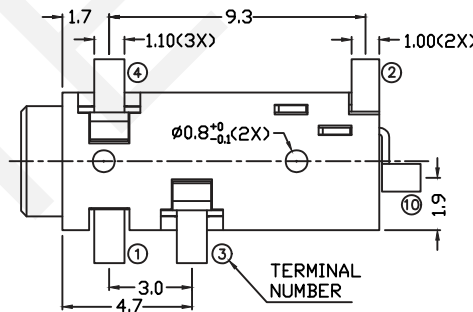

Technical parameters:
Rated voltage: DC 30 V
Rated current: 0.5 A
Contact resistance: 0.03Ω, max
Insulation resistance: 100MΩ, min
Pressure: AC500V (50Hz) / 1minute
Insertion Force :2-20 N
Life: 50000 times
Operating Temperature:-30°C~70°C
Material:
Terminal 1 : Copper Alloy
Terminal 2 : Copper Alloy
Terminal 3 : Copper Alloy
Terminal 4 : Copper Alloy
Terminal10 : Brass
Housing :Pa6T

ORDER INFORMATION
RHTAYPJ2.5-008A

2.5 SMD Stereo Jack
Schematic: See Annex

MODEL NO.	RHTAYPJ2.5-008	RHTAYPJ2.5-008A	RHTAYPJ2.5-008B
SCHEMATIC			

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5

CHK'D BY FENG
APPR BY ZHAN

SMD Stereo Jack	
THIRD ANGLE PROJECTION 	RHTAYPJ2.5-008