
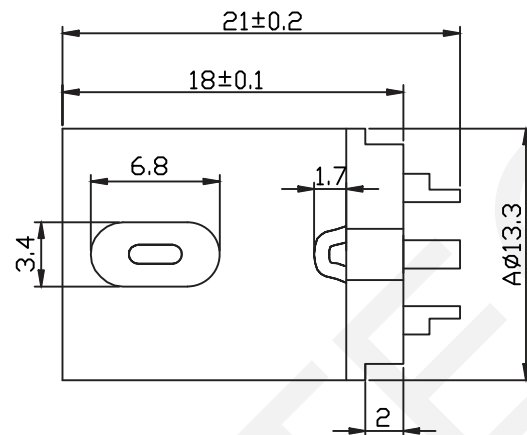
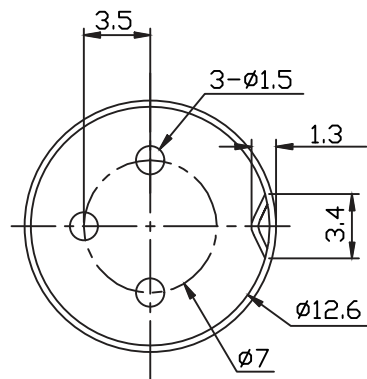


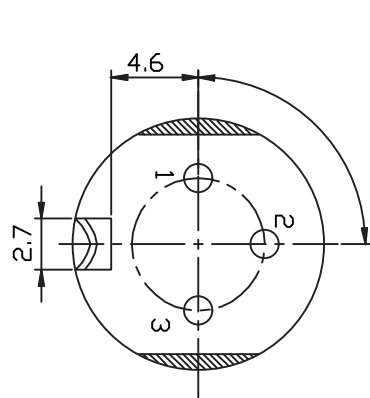

Technical Characteristics:

1. use conditions:

Ambient temperature: ~70°C - 25°C

Relative humidity: 95% (40 degrees C)

2. rated load: AC 2A 100V

3. Contact resistance: ≤ 30m ohm

4. Insulation resistance: ≥ 100M ohm

5. pressure: AC 500V (50Hz) 1min

6. Insertion force: 10-50N

7. Life: 5000 times

ORDER INFORMATION

Product NO.: RHTAYSCT-3-07M

Terminal Series

Pin Number: 3-3P

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE: ---

DRWN BY PAN

Terminal Series

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

±0.12

±0.15



±0.3

±0.5

APPR BY ZHAN



RHTAYSCT-3-07M

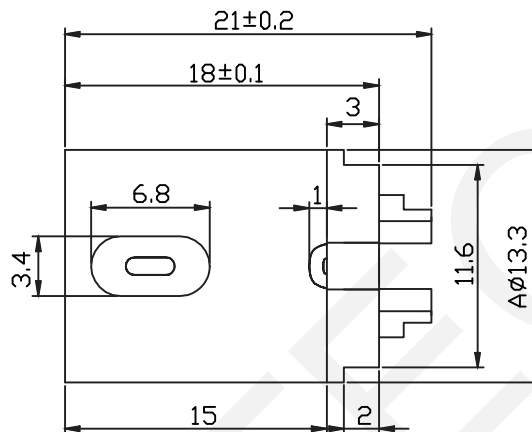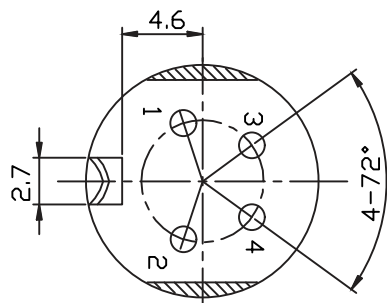

Technical Characteristics:

1. use conditions:

Ambient temperature: ~70 C-25 C

Relative humidity: 95% (40 degrees C)

2. rated load: AC2A 100V


3. Contact resistance: 3 30m ohm

4. Insulation resistance: 4 100M ohm

5. pressure: AC 500V(50Hz)1min

6. Insertion force: 10-50N

7. Life: 5000 times

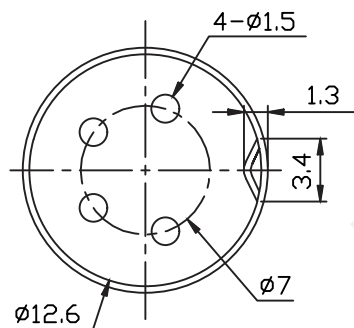

ORDER INFORMATION

Product NO.: RHTAYSCT-4-07M

Terminal Series

Pin Number: 4-4P

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

Terminal Series

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

±0.12

±0.15


±0.3

±0.5

APPR BY ZHAN



RHTAYSCT-4-07M

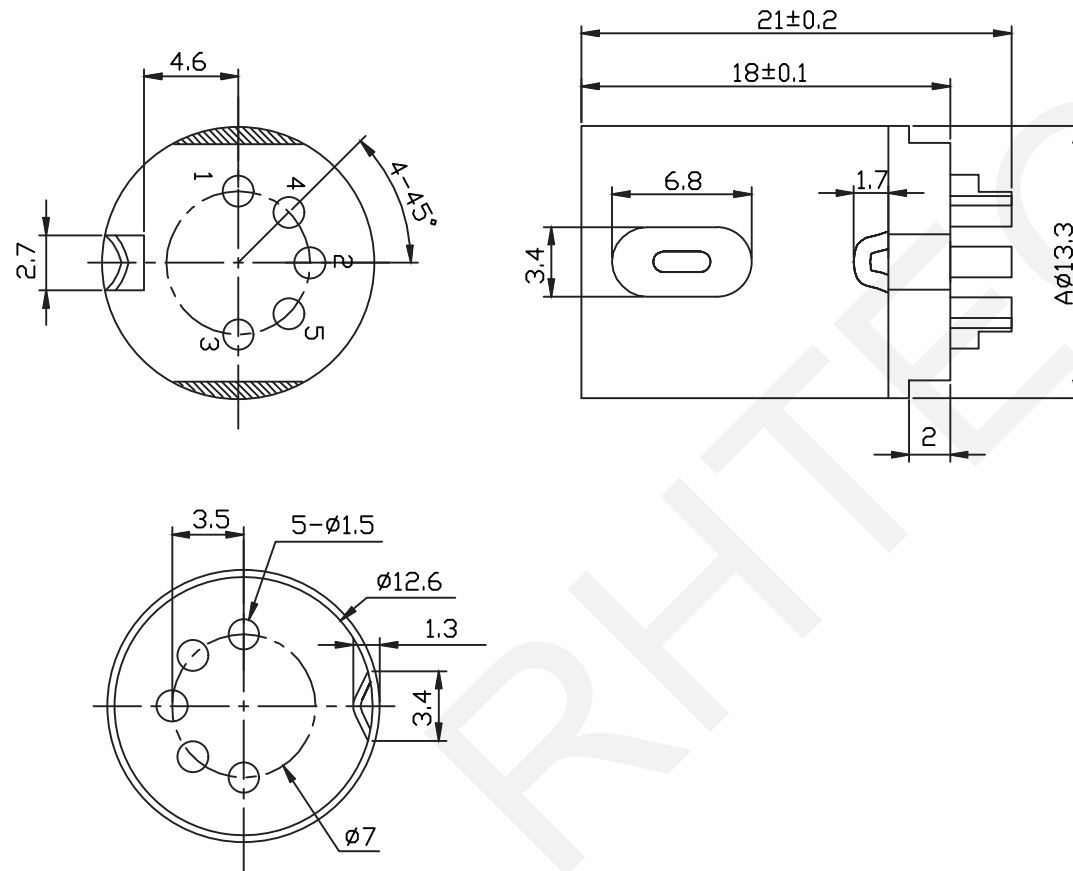

Technical Characteristics:

1.use conditions:

Ambient temperature: $\sim 70^{\circ}\text{C} - 25^{\circ}\text{C}$

Relative humidity: 95% (40°C)

2.rated load: AC2A 100V

3.Contact resistance: $\leq 30\text{m}\Omega$

4.Insulation resistance: $\geq 100\text{M}\Omega$

5.pressure: AC 500V(50Hz)1min

6.Insertion force: 10-50N

7.Life: 5000 times

ORDER INFORMATION

Product NO.: RHTAYSCT-5-07M

Terminal Series

Pin Number: 5-5P

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE: ---

DRWN BY PAN

Terminal Series

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

± 0.12

± 0.15




± 0.3

± 0.5

APPR BY ZHAN



RHTAYSCT-5-07M

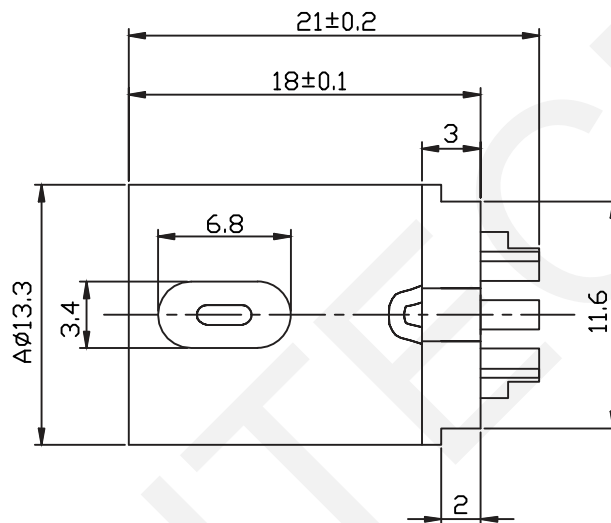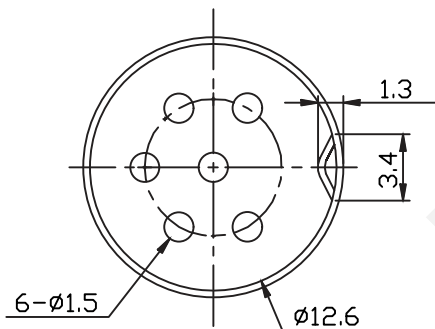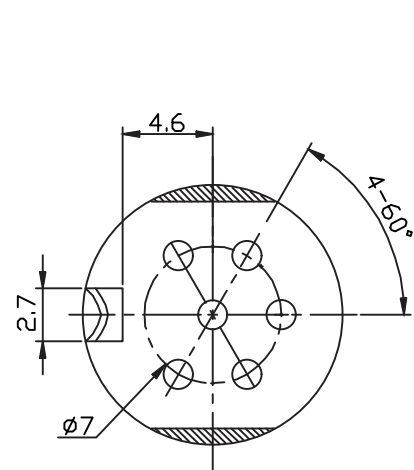

Technical Characteristics:

1. use conditions:

Ambient temperature: -70°C -25°C

Relative humidity: 95% (40°C)

2. rated load: AC2A 100V

3. Contact resistance: $330\text{m}\Omega$

4. Insulation resistance: $4100\text{M}\Omega$

5. pressure: AC 500V (50Hz) 1min

6. Insertion force: 10-50N

7. Life: 5000 times

ORDER INFORMATION

Product NO.: RHTAYSCT-6-07M

Terminal Series

Pin Number: 6-6P

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

Terminal Series

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION


± 0.12

± 0.15


± 0.3

± 0.5

APPR BY ZHAN



RHTAYSCT-6-07M

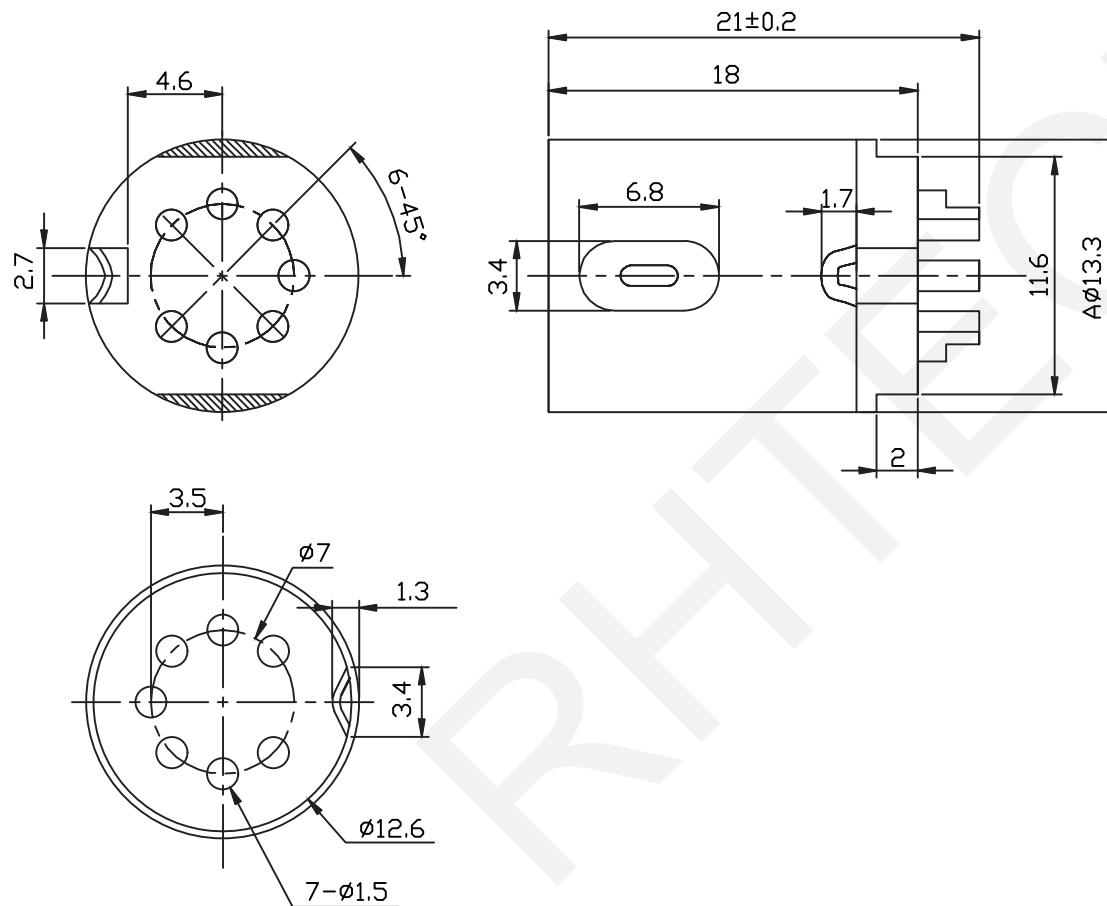

Technical Characteristics:

1. use conditions:

Ambient temperature: -70°C ~ 25°C

Relative humidity: 95% (40°C)

2. rated load: AC2A 100V

3. Contact resistance: $\leq 30\text{m}\Omega$

4. Insulation resistance: $\geq 100\text{M}\Omega$

5. pressure: AC 500V (50Hz) 1min

6. Insertion force: 10~50N

7. Life: 5000 times

ORDER INFORMATION

Product NO.: RHTAYSCT-7-07M

Terminal Series

Pin Number: 7-7P

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE: ---

DRWN BY PAN

Terminal Series

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

± 0.12

± 0.15


± 0.3

± 0.5

APPR BY ZHAN



RHTAYSCT-7-07M

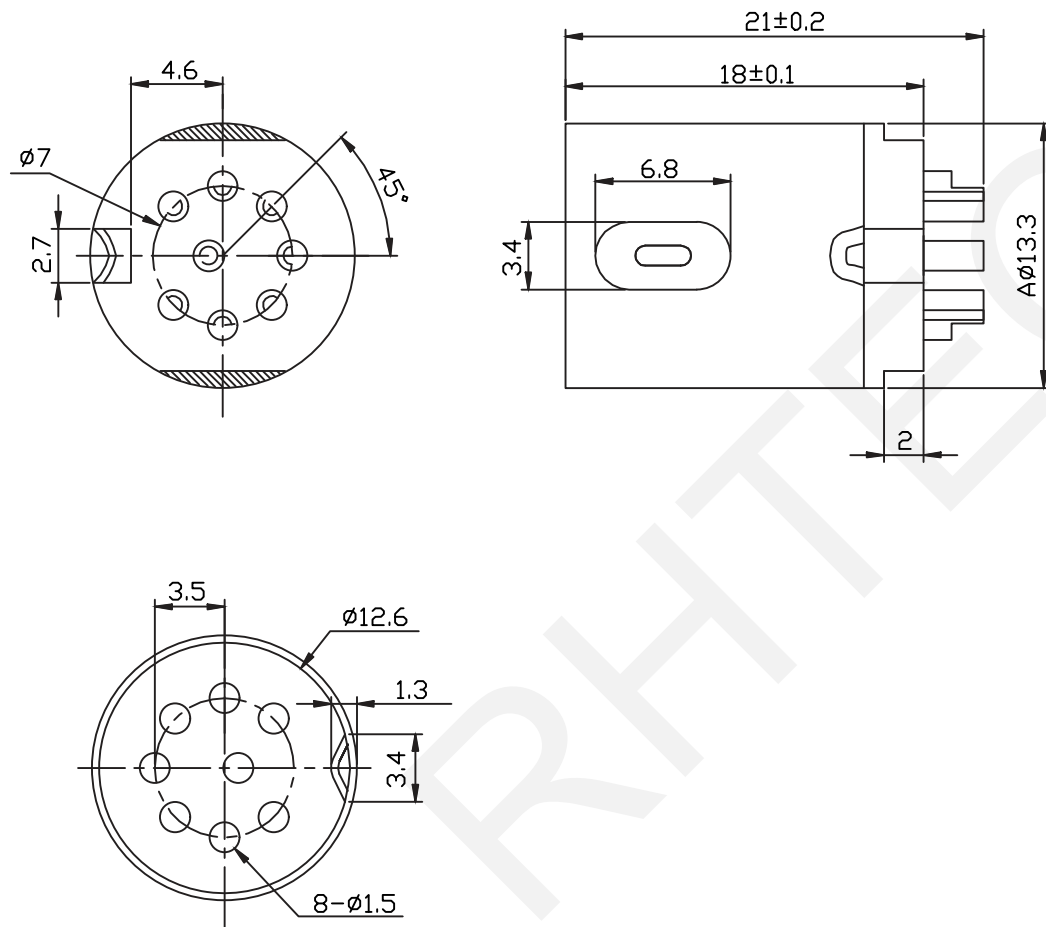

Technical Characteristics:

1. use conditions:

Ambient temperature: -70°C -25°C

Relative humidity: 95% (40°C)

2. rated load: AC2A 100V

3. Contact resistance: $30\text{m}\Omega$

4. Insulation resistance: $400\text{M}\Omega$

5. pressure: AC 500V (50Hz) 1min

6. Insertion force: 10-50N

7. Life: 5000 times

ORDER INFORMATION

Product NO: RHTAYSCT-8-07M

Terminal Series

Pin Number: 8-8P

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

Terminal Series

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

± 0.12

± 0.15


± 0.3

± 0.5

APPR BY ZHAN



RHTAYSCT-8-07M

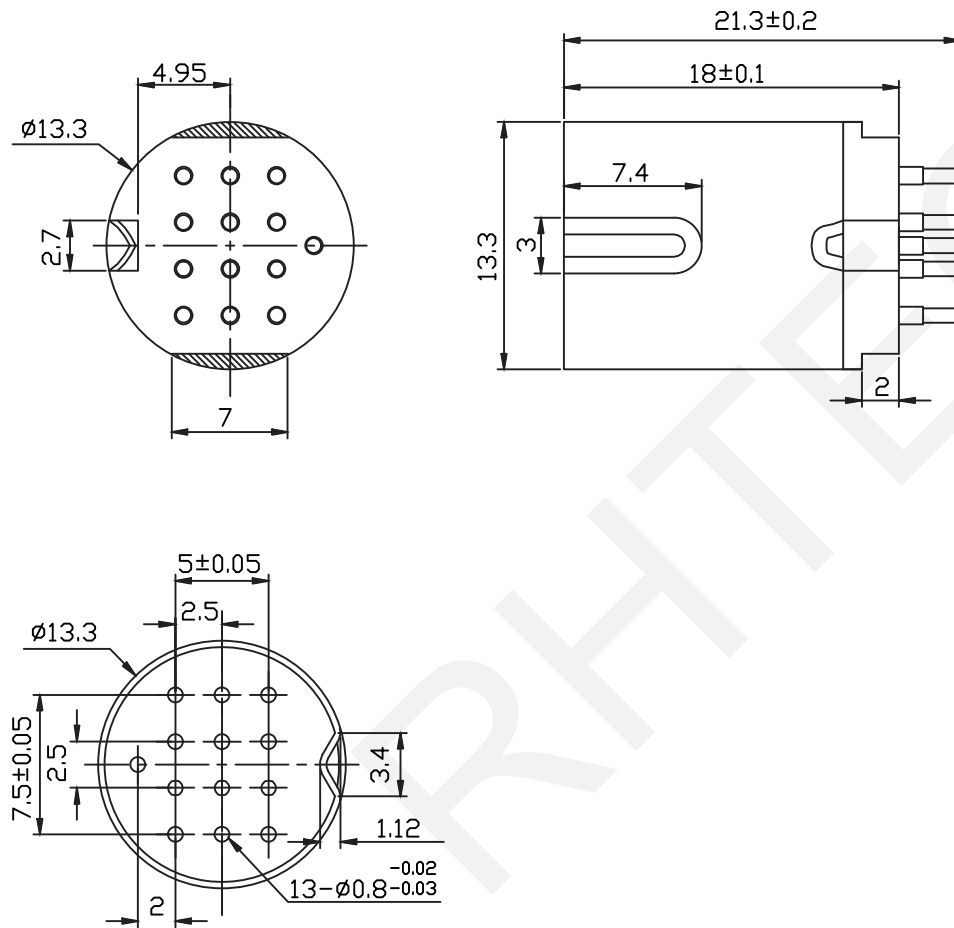

Technical Characteristics:

1. use conditions:

Ambient temperature: -70 C~25 C

Relative humidity: 95% (40 degrees C)

2. rated load: AC2A 100V

3. Contact resistance: ≤30m ohm

4. Insulation resistance: ≥100M ohm

5. pressure: AC 500V(50Hz)1min

6. Insertion force: 10~50N

7. Life: 5000 times

ORDER INFORMATION

Product NO: RHTAYSCT-13-07M

Terminal Series

Pin Number: 13-13P

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE: ---

DRWN BY PAN

Terminal Series

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



RHTAYSCT-13-07M