



Ø2.5 MATE PLUG

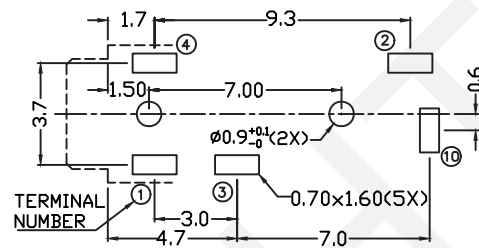

PCB LAYOUT
<BOTTOM VIEW>

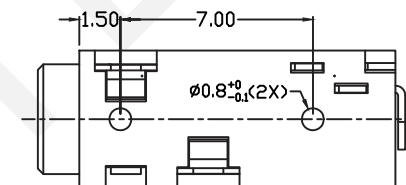

Technical parameters:
 Rated voltage: DC 30 V
 Rated current: 0.5 A
 Contact resistance: 0.03Ω, max
 Insulation resistance: 100MΩ, min
 Pressure: AC500V (50Hz) / 1minute
 Insertion Force: 2-20 N
 Life: 50000 times
 Operating Temperature: -30°C~70°C
 Material:
 Terminal 1 : Copper Alloy
 Terminal 2 : Copper Alloy
 Terminal 3 : Copper Alloy
 Terminal 4 : Copper Alloy
 Terminal10 : Brass
 Housing : Pa66

ORDER INFORMATION
 RHTAYSJ2.5-001A

2.5 Dip Stereo Jack Type
 Schematic: See Annex

MODEL NO.	RHTAYSJ2.5-001	RHTAYSJ2.5-001A	RHTAYSJ2.5-001B
SCHEMATIC			

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5

CHK'D BY FENG
 APPR BY ZHAN

Dip Stereo Jack	
THIRD ANGLE PROJECTION 	RHTAYSJ2.5-001