






Technical parameters:
 Rated voltage: DC 30 V
 Rated current: 0.5 A
 Contact resistance: 0.03Ω, max
 Insulation resistance: 100MΩ, min
 Pressure: AC500V (50Hz) / 1minute
 Insertion Force: 2~20 N
 Life: 50000 times
 Operating Temperature: -30°C~70°C
 Material:
 Housing/Cover: PA66
 Terminal 1: Copper Alloy
 Terminal 2: Ti-Cu
 Terminal 3: Copper Alloy
 Terminal 4: Copper Alloy
 Terminal 10: Brass
 Terminal 11: Brass



2.5 MATE PLUG

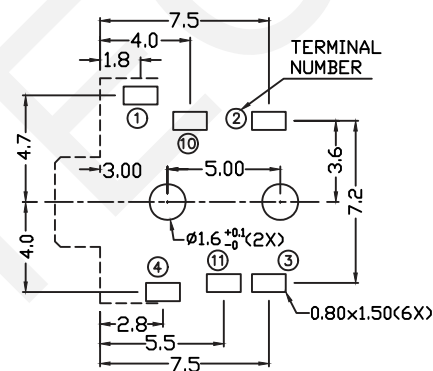

PCB LAYOUT
 <BOTTOM VIEW>

MODEL NO.	RHTAYSJ2.5-003	RHTAYSJ2.5-003A	RHTAYSJ2.5-003B	RHTAYSJ2.5-003C
SCHEMATIC				

ORDER INFORMATION

RHTAYSJ2.5-003A

2.5 Dip Stereo Jack Type

Schematic: See Annex

RHTECP® NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

SMD Stereo Jack

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION



RHTAYSJ2.5-003

±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN