
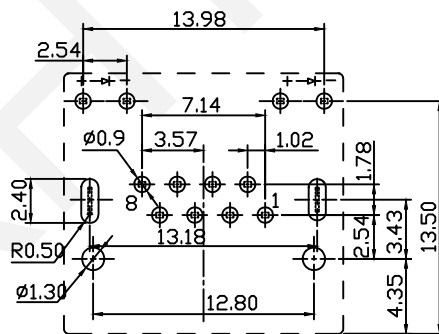
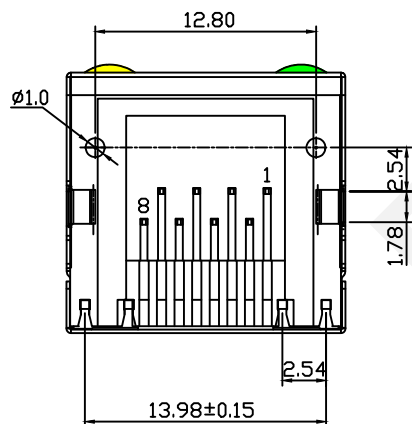
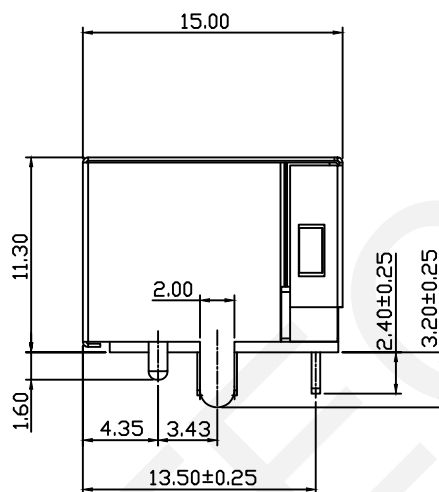


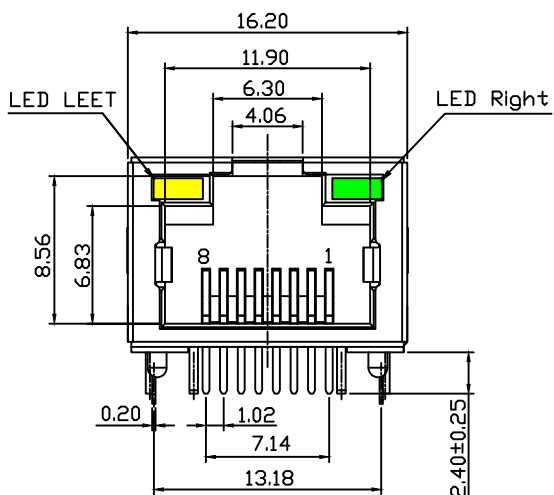

Recommended PCB Layout
Tolerance±0.05

Material:

Housing:PBT+Glass Filled Polyester
Flammability Rating:UL94V-0
Contacts:Phosphor Bronze $\varnothing 0.46\text{mm}$
Plating:Gold Plating
Shield:Brass, Tin Plating

Electrical:

Voltage Rating:125VAC
Current Rating:1.5A
Contact Resistance:30m Ω Max.
Insulation Resistance: 500M Ω Min.
Dielectric Strength:1000VAC Rms 50Hz,1 Min.
Durability:600 cycles Min.
Operation Temperature:-40 $^{\circ}\text{C}$ ~+70 $^{\circ}\text{C}$

Order Information

RHTLY01-8P8C-X/X-XX

Contacts:6P6C

LED CODE: LEFT/RIGHT

Y/G-YELLOW/GREEN

G/Y-GREEN/YELLOW

Plating Code:

01-Fu" Gold Plating

02-3u" Gold Plating

03-6u" Gold Plating

04-15u" Gold Plating

05-30u" Gold Plating

RHTECP® NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

RJ45-8P8C 1x1 Low Profile
Modular jacks Right Angle

0~3


3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION



RHTLY01-8P8C-X/X-XX

±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN