



1 2 3 4 5 6 7 8 9


A

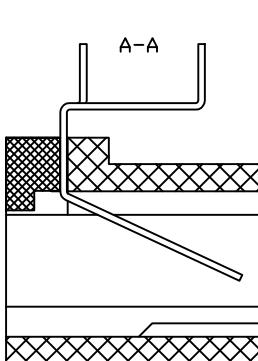


B

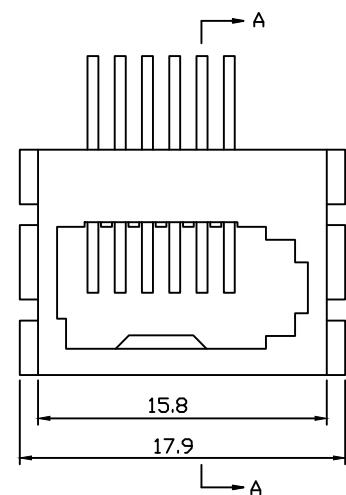

C

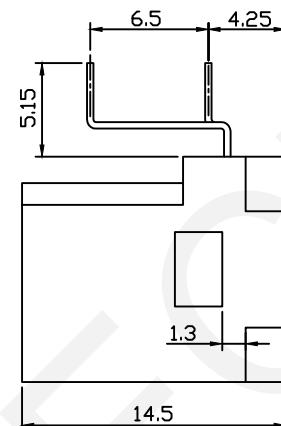


D



PCB Layout

E

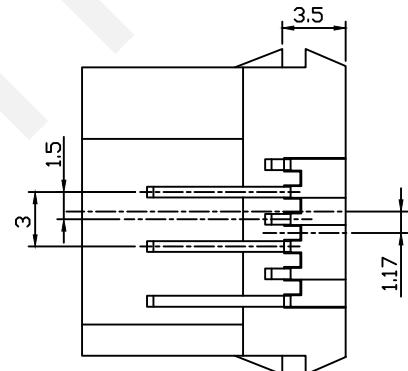

F

Material:

Housing:PBT+Glass Filled Polyester

Flammability Rating:UL94V-0

Contacts:Phosphor Bronze Ø0.46mm

Plating:Gold Plating

Electrical:

Voltage Rating:125VAC

Current Rating:1.5A

Contact Resistance:30mΩ Max.

Insulation Resistance: 500MΩ Min.

Dielectric Strength:1000VAC Rms 50Hz,1 Min.

Durability:600 cycles Min.

Operation Temperature:-40°C~+70°C

Order Information

RHTLYK02-6P6C-09-XX

Contacts:6P6C

Color Code:

09-WHITE

Plating Code:

01-Fu" Gold Plating

02-3u" Gold Plating

03-6u" Gold Plating

04-15u" Gold Plating

05-30u" Gold Plating



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

Modular jacks 6P6C jack

0~3

3~18

18~50

50~120

CHK'D BY FENG

±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



RHTLYK02-6P6C-09-XX

1

2

3

4

5

6

7

8

9

A

B

C

D

E

F

G