



1 2 3 4 5 6 7 8 9


A

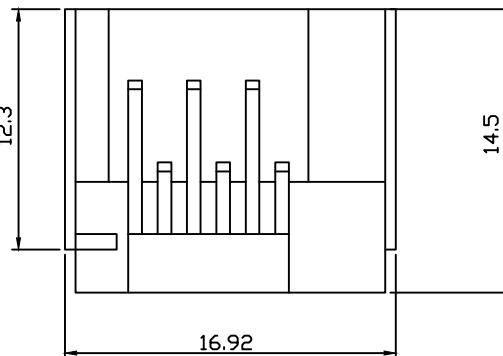

B

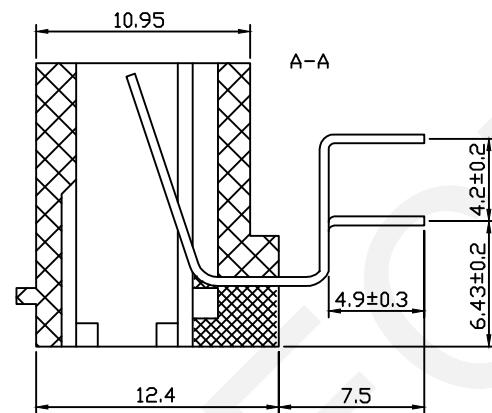


C



PCB Layout

D

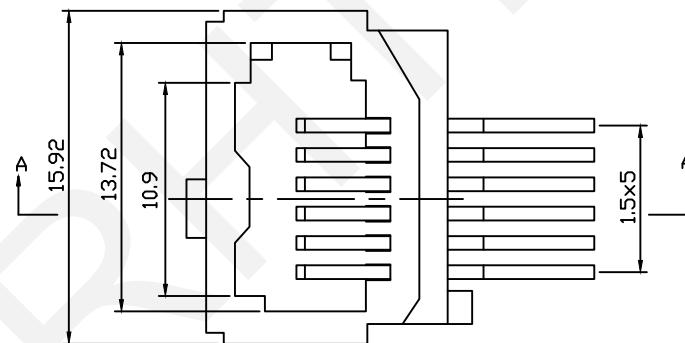

E

Material:

Housing: PBT+Glass Filled Polyester

Flammability Rating: UL94V-0

Contacts: Phosphor Bronze Ø0.46mm

Plating: Gold Plating

Electrical:

Voltage Rating: 125VAC

Current Rating: 1.5A

Contact Resistance: 30mΩ Max.

Insulation Resistance: 500MΩ Min.

Dielectric Strength: 1000VAC Rms 50Hz, 1 Min.

Durability: 600 cycles Min.

Operation Temperature: -40°C ~ +70°C

Order Information

RHTLYK03-6P6C-09-XX

Contacts: 6P6C

Color Code:

09-WHITE

Plating Code:

01-Fu" Gold Plating

02-3u" Gold Plating

03-6u" Gold Plating

04-15u" Gold Plating

05-30u" Gold Plating



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

Modular jacks 6P6C jack

0~3

3~18

18~50

50~120

CHK'D BY FENG

±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



RHTLYK03-6P6C-09-XX

1

2

3

4

5

6

7

8

9

A

B

C

D

E

F

G