

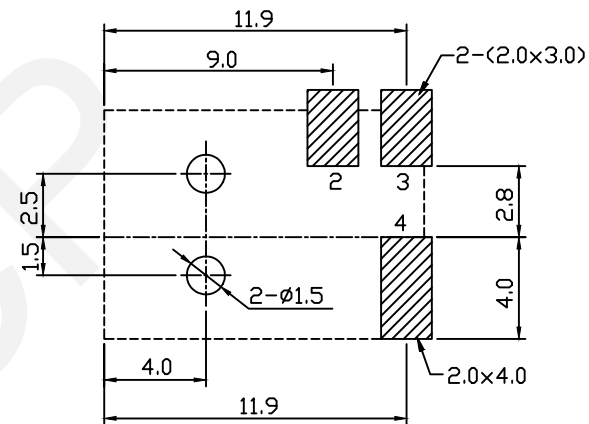
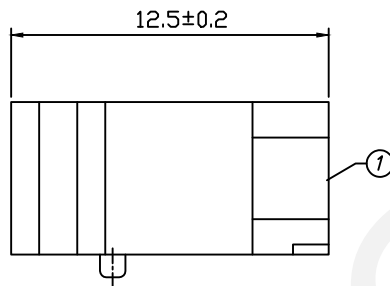
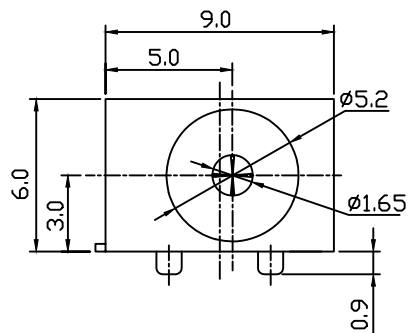
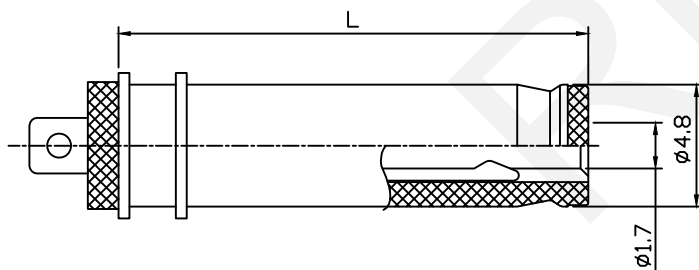


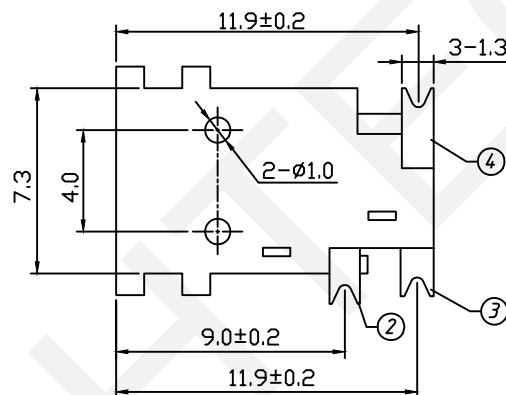

PCB LAYOUT TOP VIEW


SPECIFICATION

Rated Load:DC 30V 1A
Contact Resistance:30mΩ, Max
Insulation Resistance:100MΩ, Min
Withstand Voltage:AC500V
Actuating Force:3-20N
Life:5000 Cycles
Operating Temperature:-30°C-70°C

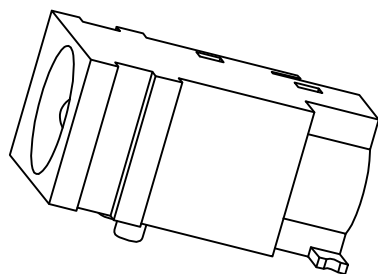

RECOMMENDED PLUG

SCHEMATIC



NO	Description	QTY	Material	Plating
1	Housing	1	PA9T	---
2	Spring Piece	1	Bronze	Ag-Plating
3	Curve Piece	1	Brass	Ag-Plating
4	PIN	1	Brass	Ni-Plating

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4		SCALE:---
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5

DRWN BY PAN

CHK'D BY FENG

APPR BY ZHAN

DC POWER Jack SMT HORIZONTAL

THIRD ANGLE PROJECTION



RHTAYDC-005