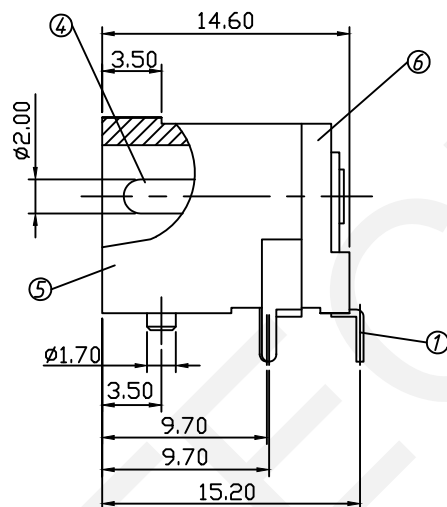


PIN	ø2.0	ø2.5
APP□		

NO	Description	QTY	Material	Plating
1	PIN Terminal	1	0.4TBrass	Silver Plated
2	Sleeve Spring	1	0.25T Phosphor Bronze	Silver Plated
3	Break Terminal	1	0.4TBrass	Silver Plated
4	Pin(Ø2.0)	1	Copper	Ni-Plating
5	Housing	1	PA9T	Black Color
6	Cover	1	PA9T	Black Color

Pin Hole Layout Jack Bottom View

SPECIFICATION

Rated Load:DC 30V 0.5A

Contact Resistance: 30mΩ, Max

Insulation Resistance:100MΩ, Min

Withstand Voltage:AC500V

Actuating Force: 3-20N

Life:5000 Cycles

Operating Temperature: -30°C-70°C