

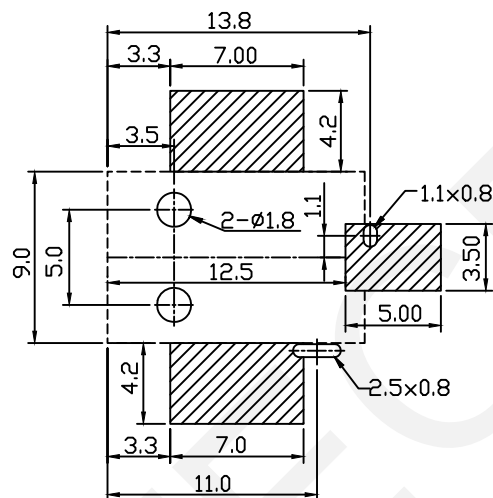
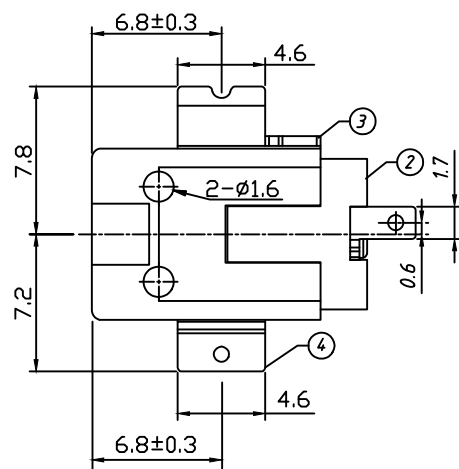
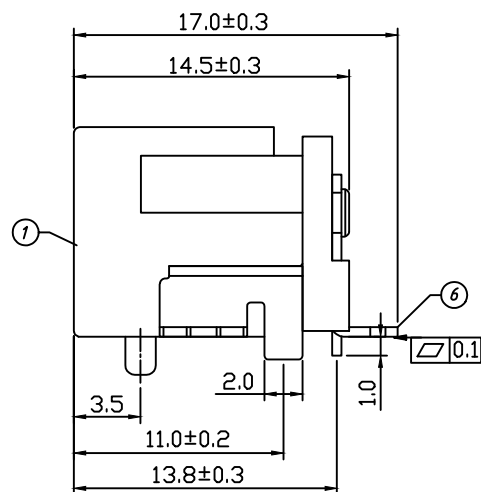
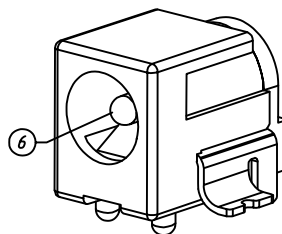


RECOMMENDED PLUG

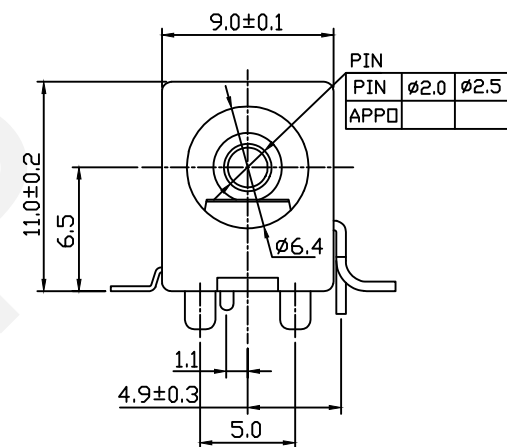

SCHEMATIC



SPECIFICATION

Rated Load:DC 30V 1A

Contact Resistance: 30mΩ, Max

Insulation Resistance:100MΩ, Min

Withstand Voltage:AC500V

Actuating Force: 3-20N

Life: 5000 Cycles

Operating Temperature: -30°C-70°C

No	Description	QTY	Material	Plating
1	Housing	1	LCP	---
2	Cover	1	LCP	---
3	Spring Piece	1	Bronze	Ag-Plating
4	Curve Piece	1	Brass	Ag-Plating
5	Flat Foot	1	Brass	Ag-Plating
6	PIN	1	Brass	Ni-Plating