

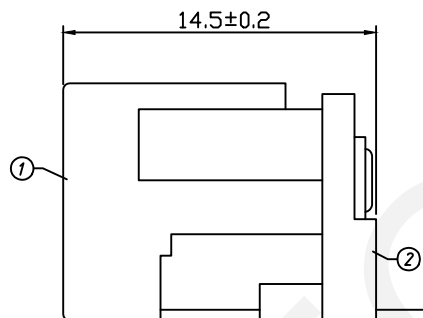
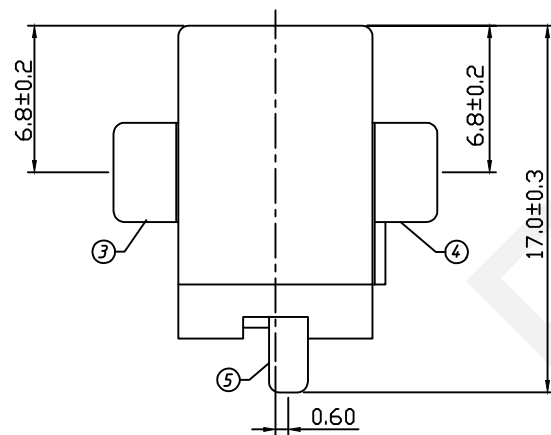
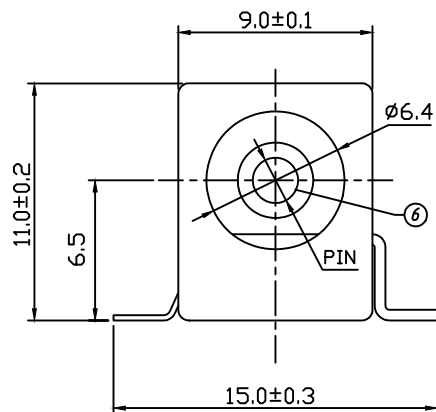


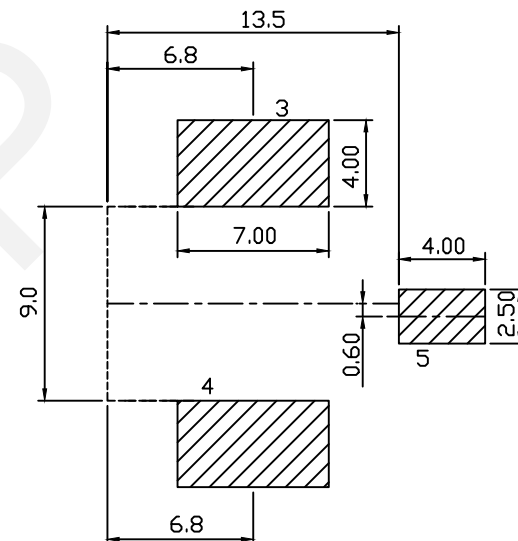

PIN	Ø2.0	Ø2.5
APPO		

SCHEMATIC



PCB LAYOUT TOP VIEW

SPECIFICATION

Rated Load:DC 30V 1A
 Contact Resistance:30mΩ, Max
 Insulation Resistance:100MΩ, Min
 Withstand Voltage:AC500V
 Actuating Force:3~20N
 Life:5000 Cycles
 Operating Temperature:-30°C~70°C

NO	Description	QTY	Material	Plating
1	Housing	1	PA9T	---
2	Cover	1	PA9T	---
3	Spring Piece	1	Bronze	Ag-Plating
4	Curve Piece	1	Brass	Ag-Plating
5	Flat Foot	1	Brass	Ag-Plating
6	PIN	1	Brass	Ni-Plating

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

DC POWER Jack SMT HORIZONTAL

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION



RHTAYDC-008F

±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN