


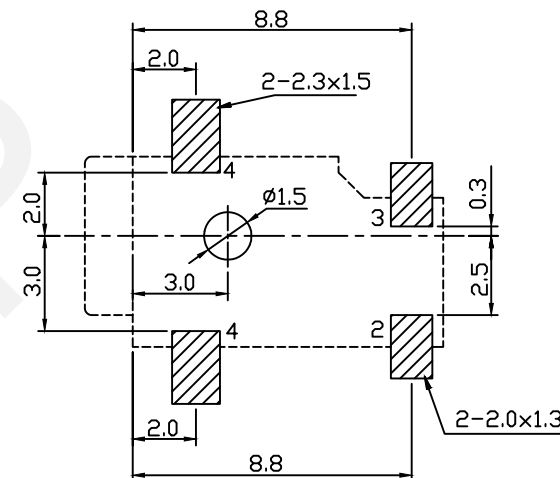
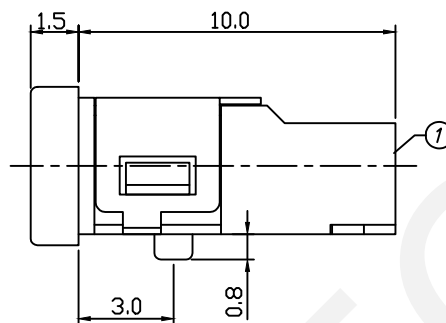


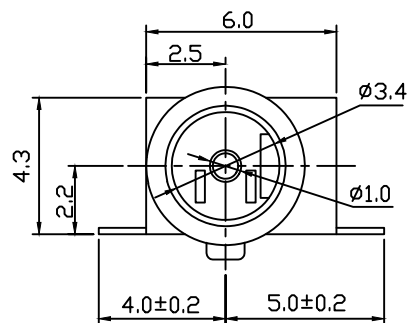

PCB LAYOUT TOP VIEW

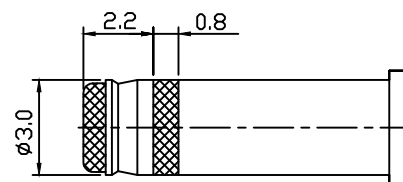

RECOMMENDED PLUG

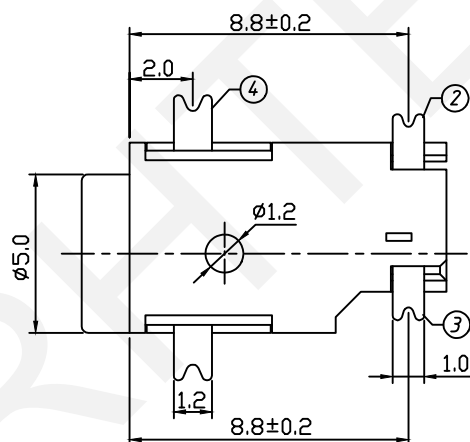

SPECIFICATION

Rated Load:DC 30V 1A

Contact Resistance:30mΩ, Max


Insulation Resistance:100MΩ, Min

Withstand Voltage:AC500V


Actuating Force:3-20N

Life:5000 Cycles

Operating Temperature:-30°C~70°C



SCHEMATIC



NO	Description	QTY	Material	Plating
1	Housing	1	PA9T	---
2	Spring Piece	1	Bronze	Au-Plating
3	PIN	1	Bronze	Au-Plating
4	Contact Foot	1	Bronze	Au-Plating

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---
0~3	3~18	18~50
50~120		
±0.12	±0.15	±0.3
±0.5		


DRWN BY PAN

CHK'D BY FENG

APPR BY ZHAN

DC POWER Jack SMT HORIZONTAL

THIRD ANGLE PROJECTION



RHTAYDC-009