


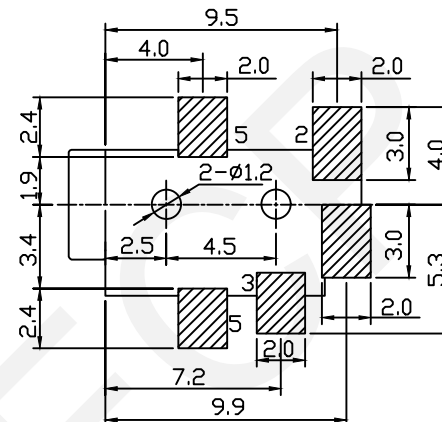
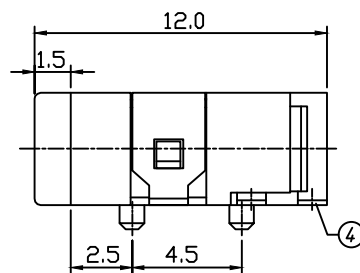







PCB LAYOUT TOP VIEW



SCHEMATIC



Ø3.0xØ1.1 DC POWER PLUG

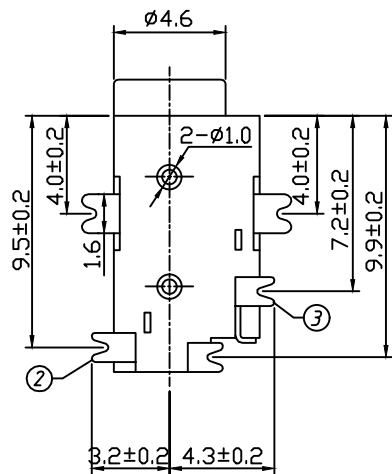

NO	Description	QTY	Material	Plating
1	Housing	1	PA9T	---
2	Curve Piece	1	Brass	Au-Plating
3	Spring Piece	1	SUS301	Au-Plating
4	PIN	1	Brass	Au-Plating
5	Contact Foot	1	Bronze	Au-Plating

SPECIFICATION

Rated Load:DC 30V 1A
Contact Resistance:30mΩ, Max
Insulation Resistance:100MΩ, Min
Withstand Voltage:AC500V
Actuating Force:3-20N
Life:5000 Cycles
Operating Temperature:-30°C-70°C


RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5

CHK'D BY FENG
APPR BY ZHAN

DC POWER Jack SMT HORIZONTAL

THIRD ANGLE PROJECTION



RHTAYDC-010