


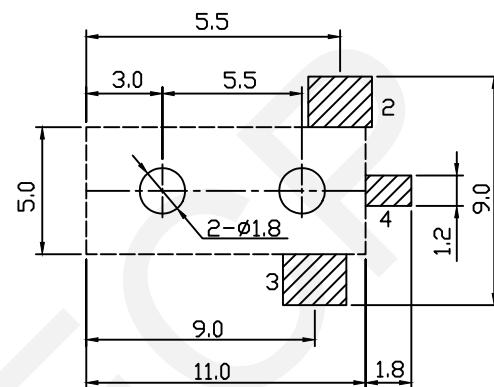
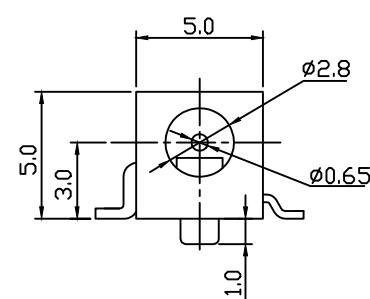
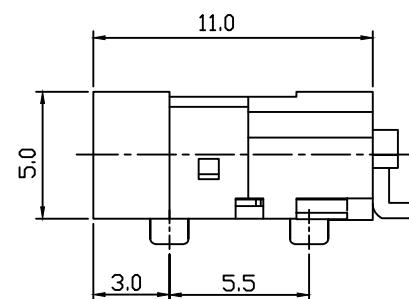


1 2 3 4 5 6 7 8 9

A

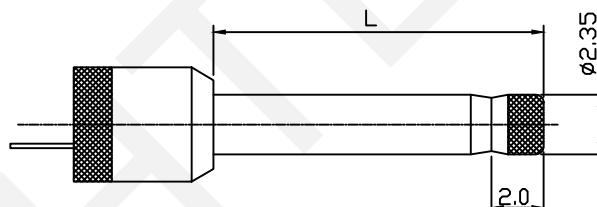


PCB LAYOUT TOP VIEW

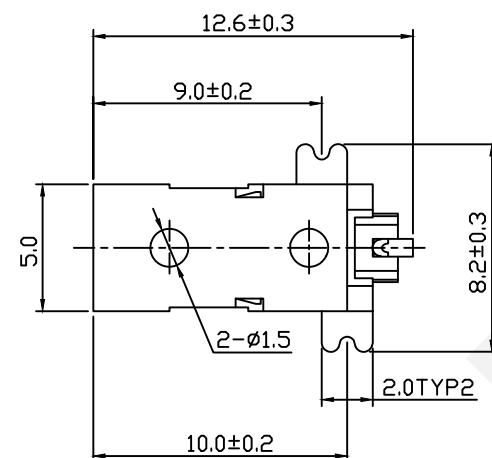

RECOMMENDED PLUG

NO	Description	QTY	Material	Plating
1	Housing	1	PA9T	---
2	Flat Piece	1	Brass	Ag-Plating
3	Spring	1	Brass	Ag-Plating
4	PIN	1	Bronze	Ag-Plating

SCHEMATIC



SPECIFICATION

Rated Load: DC 30V 1A

Contact Resistance: 30mΩ, Max

Insulation Resistance: 100MΩ, Min

Withstand Voltage: AC 500V

Actuating Force: 3-20N

Life: 5000 Cycles

Operating Temperature: -30°C-70°C



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm SHEET SIZE: A4 SCALE:--- DRWN BY PAN
 0~3 3~18 18~50 50~120 CHK'D BY FENG
 ±0.12 ±0.15 ±0.3 ±0.5 APPR BY ZHAN

DC POWER Jack SMT HORIZONTAL



RHTAYDC-019

1 2 3 4 5 6 7 8 9