
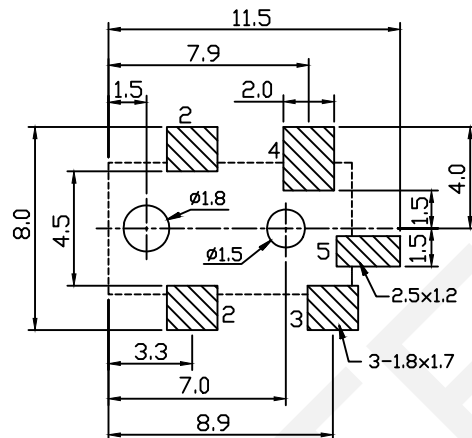


Rated Load:DC 30V 1A  
Contact Resistance:30mΩ, Max  
Insulation Resistance:100MΩ, Min  
Withstand Voltage:AC500V  
Actuating Force:3-20N  
Life:5000 Cycles  
Operating Temperature:-30°C-70°C

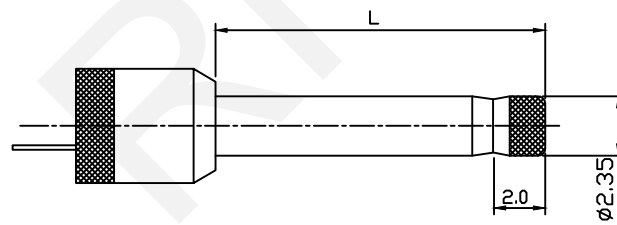

PCB LAYOUT TOP VIEW

RECOMMENDED PLUG

| NO | Description  | QTY | Material | Plating    |
|----|--------------|-----|----------|------------|
| 1  | Housing      | 1   | PA9T     | ---        |
| 2  | Contact Foot | 1   | Brass    | Ag-Plating |
| 3  | Curve Piece  | 1   | Brass    | Ag-Plating |
| 4  | Spring       | 1   | Bronze   | Ag-Plating |
| 5  | PIN1         | 1   | Brass    | Ag-Plating |
| 6  | Contact Foot | 1   | Brass    | Ag-Plating |