

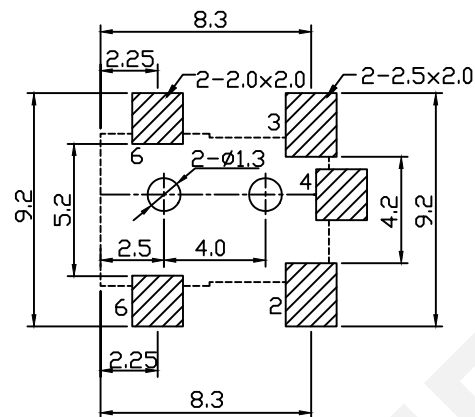





PCB LAYOUT TOP VIEW



SPECIFICATION

Rated Load:DC 30V 0.5A

Contact Resistance:30mΩ, Max


Insulation Resistance:100MΩ, Min

Withstand Voltage:AC500V

Actuating Force:3-20N


Life:5000 Cycles

Operating Temperature:-30°C-70°C

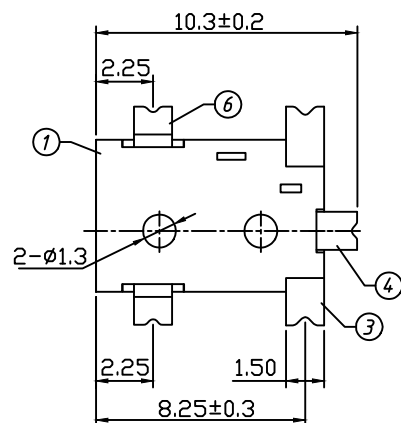

PIN	ø1.0	ø1.3
APPO		

SCHEMATIC



RECOMMENDED PLUG

ND	Description	QTY	Material	Plating
1	Housing	1	PA9T	---
2	Spring	1	Bronze	Ag-Plating
3	Curve Piece	1	Brass	Ag-Plating
4	Contact Foot	1	Brass	Ag-Plating
5	PIN 1	1	Brass	Ni-Plating
6	Contact Foot	1	Brass	Ag-Plating

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---
0~3	3~18	18~50
50~120		
±0.12	±0.15	±0.3
±0.5		

DRWN BY PAN

CHK'D BY FENG

APPR BY ZHAN

DC POWER Jack SMT HORIZONTAL

THIRD ANGLE PROJECTION



RHTAYDC-023