



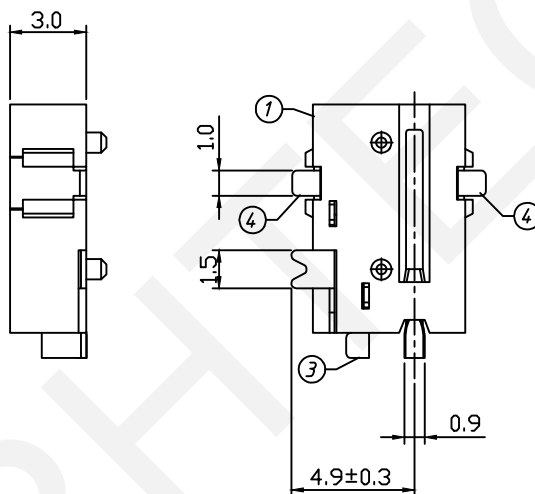


RECOMMENDED PLUG

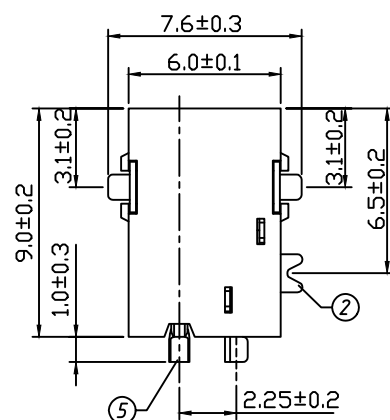

SCHEMATIC

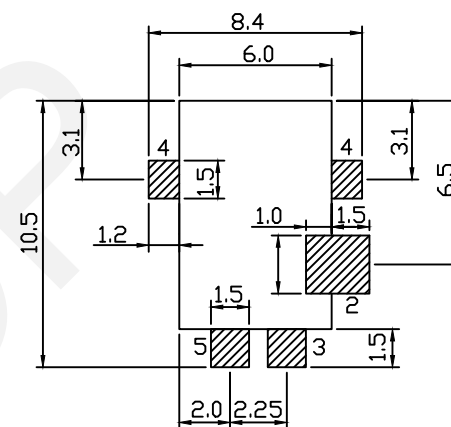

PCB LAYOUT TOP VIEW

SPECIFICATION

Rated Load:DC 30V 0.5A

Contact Resistance: 30mΩ, Max

Insulation Resistance:100M Ω , Min

Withstand Voltage:AC500V

Actuating Force: 3-20N

Life:5000 Cycles

Operating Temperature:-30°C-70°C

NO	Description	QTY	Material	Plating
1	Housing	1	PPA	---
2	Spring	1	SUS301	Ag-Plating
3	Curve Piece	1	Brass	Au-Plating
4	Curve Piece	1	Brass	Ag-Plating
5	PIN	1	Brass	Ni-Plating

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---
----------	----------------	-----------

0~3	3~18	18~50	50~120
-----	------	-------	--------

± 0.12	± 0.15	± 0.3	± 0.5
------------	------------	-----------	-----------


DRWN BY PAN

CHK'D BY FENG

APPR BY ZHAN

DC POWER Jack SMT HORIZONTAL

THIRD ANGLE PROJECTION



RHTAYDC-026