

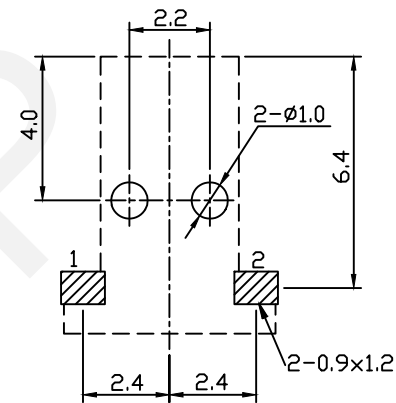
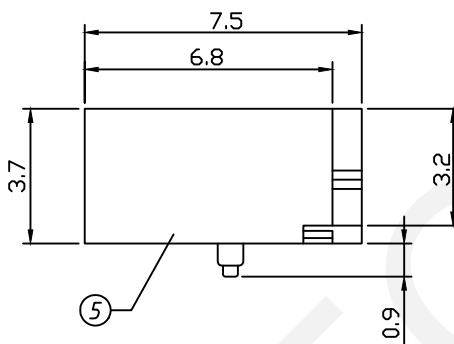
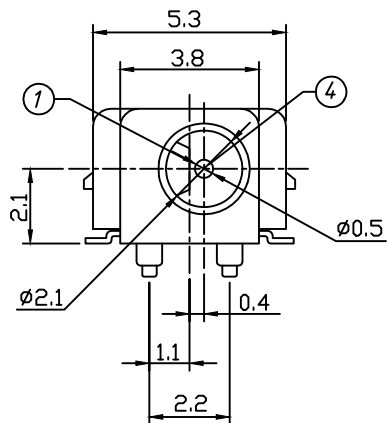


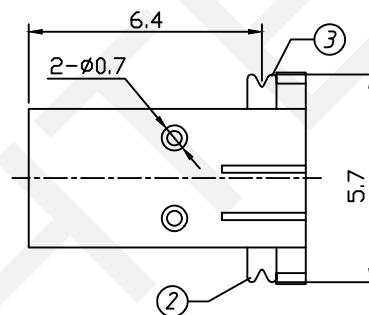


PCB LAYOUT TOP VIEW

SCHEMATIC



SPECIFICATION

Rated Load:DC 30V 0.5A
Contact Resistance:30mΩ, Max
Insulation Resistance:100MΩ, Min
Withstand Voltage:AC500V
Actuating Force:3-20N
Life:5000 Cycles
Operating Temperature:-30°C-70°C

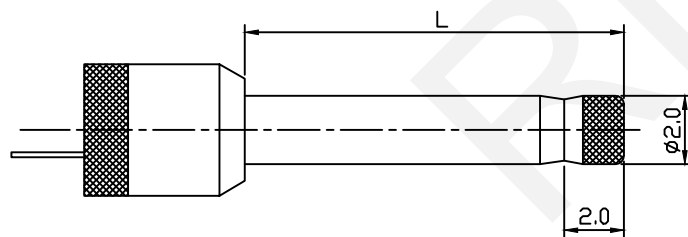

RECOMMENDED PLUG

No	Description	QTY	Material	Plating
1	Spring	1	SUS301	---
2	Spring	1	Bronze	Au-Plating
3	Contact Foot	1	Bronze	Au-Plating
4	PIN	1	Bronze	Au-Plating
5	Housing	1	PA9T	

