

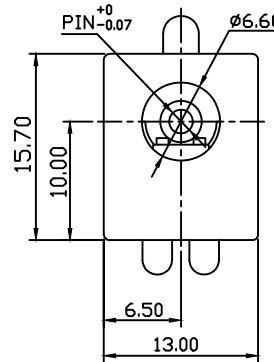
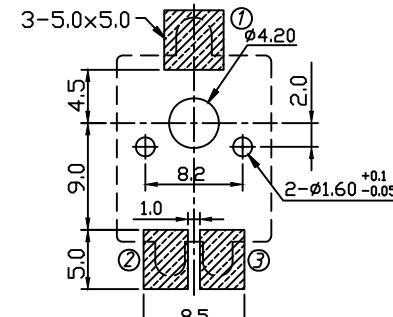


1 2 3 4 5 6 7 8 9



A

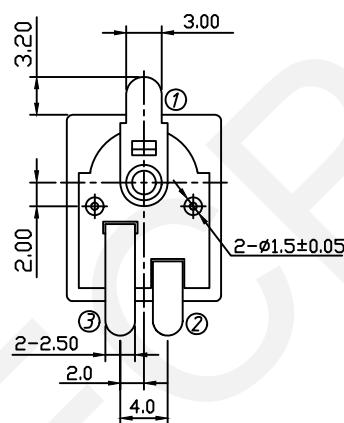


PIN	Ø2.0	Ø2.5
APPD		

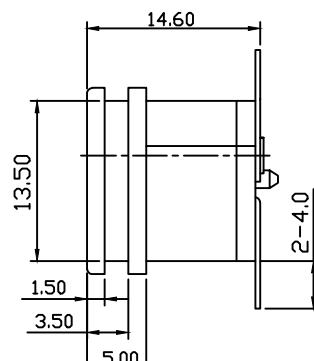


PCB Layout ±0.1 Solder Pad



DC MATE PLUG



NO	Description	QTY	Material	Plating
1	Terminal 1	1	Brass	Silver Plated
2	Terminal 2	1	PBS	Silver Plated
3	Terminal 3	1	Brass	Silver Plated
4	Centre Pin	1	PBS	Ni-Plating
5	Housing	1	PA6T	Black Color
6	Cover	1	PA6T	Black Color



SPECIFICATION

Rated Load: DC 30V 0.5A
 Contact Resistance: 30mΩ, Max
 Insulation Resistance: 100MΩ, Min
 Withstand Voltage: AC500V
 Actuating Force: 3-20N
 Life: 5000 Cycles
 Operating Temperature: -30°C-70°C



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm SHEET SIZE: A4 SCALE:---

0~3 3~18 18~50 50~120

±0.12 ±0.15 ±0.3 ±0.5

DRWN BY PAN

CHK'D BY FENG

APPR BY ZHAN

DC POWER Jack SMT HORIZONTAL



RHTAYDC-032

1 2 3 4 5 6 7 8 9

A

B

C

D

E

F

G