


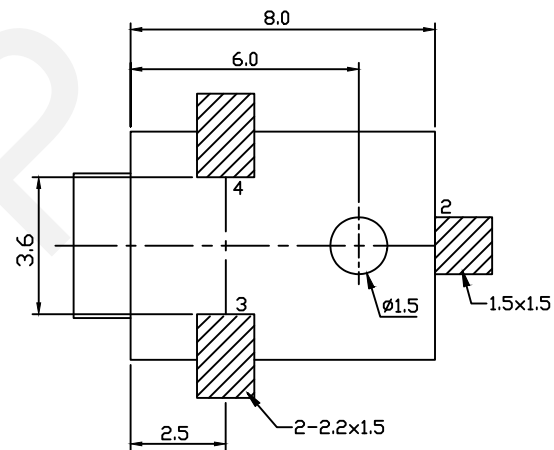
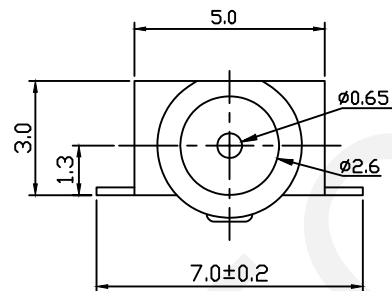


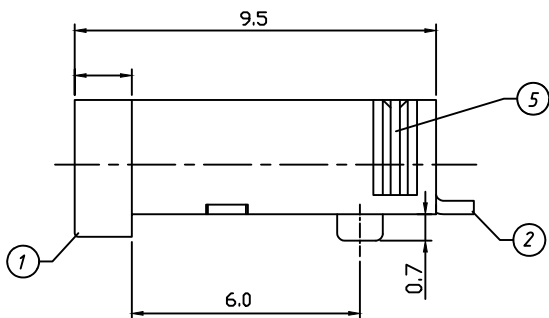

SCHEMATIC



PCB LAYOUT BOTTM VIEW

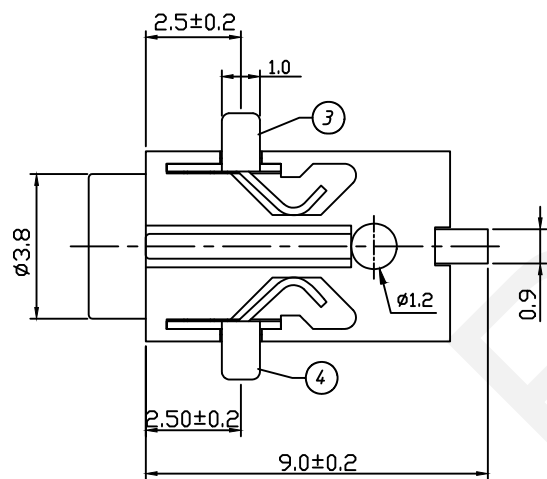

No	Description	QTY	Material	Plating
1	Housing	1	FR52	---
2	PIN	1	Bronze	Ag-Plating
3	Spring	1	Be-Cu	Ag-Plating
4	Spring	1	Be-Cu	Ag-Plating
5	Contact Foot	1	Bronze	Ag-Plating

SPECIFICATION

Rated Load:DC 30V 0.5A

Contact Resistance:30mΩ, Max

Insulation Resistance:100MΩ, Min

Withstand Voltage:AC500V

Actuating Force:3~20N

Life:5000 Cycles

Operating Temperature:-30°C~70°C



NINGBO RHT ELECTRONIC CO.,LTD


UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5

CHK'D BY FENG

APPR BY ZHAN

DC POWER Jack SMT HORIZONTAL

THIRD ANGLE PROJECTION



RHTAYDC-038