
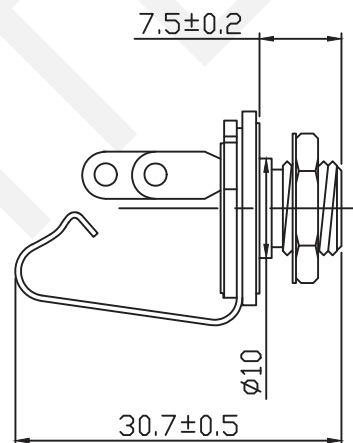
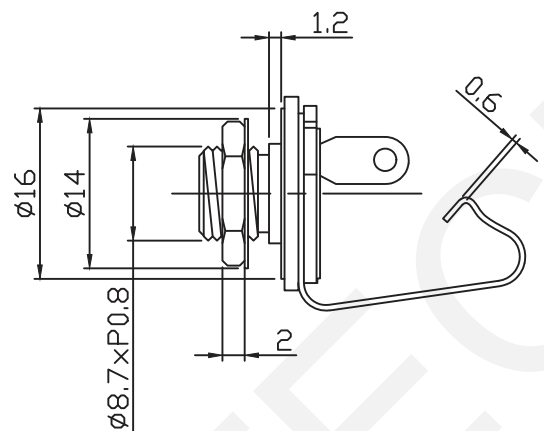
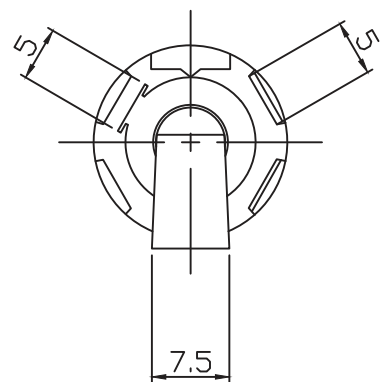


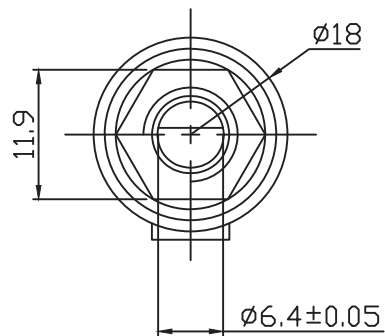

Technical parameters:
 Contact resistance: 30mΩ, max
 Insulation resistance:
 100MΩ min at DC 500V
 Dielectric Withstand voltage:
 AC 500V for one minute
 Operating Temperature: -30℃~70℃

ORDER INFORMATION
 RHTAYG6.3-001A

6.3mm Mono Jack

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

Mono Jack

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION


±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



RHTAYG6.3-001A