

1	2	3	4	5	6	7	8	9
---	---	---	---	---	---	---	---	---

A

B

C

D

E

F

A

B





C

D

E

F

G

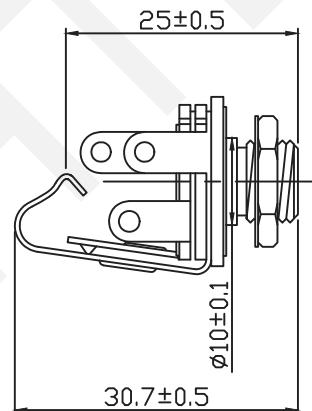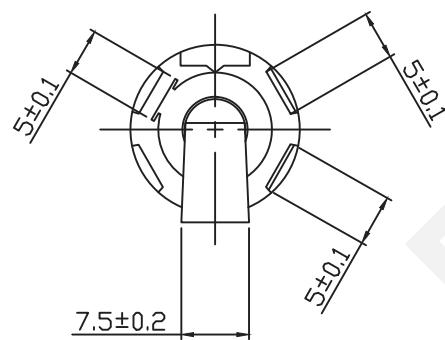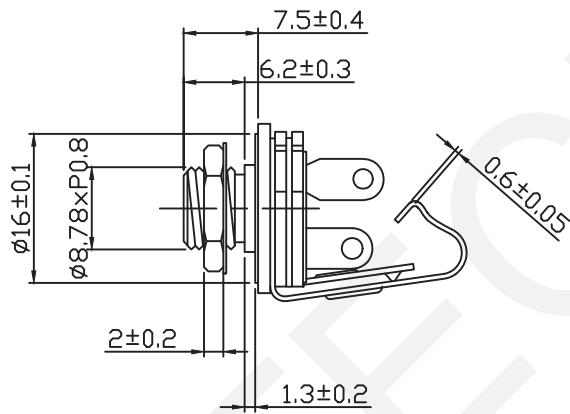

Technical parameters:

Contact resistance: 30mΩ, max

Insulation resistance:

100MΩ min at DC 500V

Dielectric Withstand voltage:

AC 500V for one minute

Operating Temperature: -30°C~70°C

ORDER INFORMATION

RHTAYG6.3-002A

6.3mm Mono Jack



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

Mono Jack

0~3

3~18

18~50

50~120

CHK'D BY FENG

±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



RHTAYG6.3-002A

1

2

3

4

5

6

7

8

9