






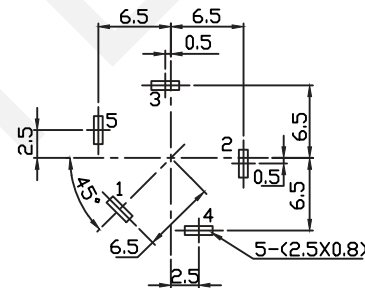

SCHEMATIC					
004B	004BA	004BB	004BC	004BD	004BE

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL:±0.3

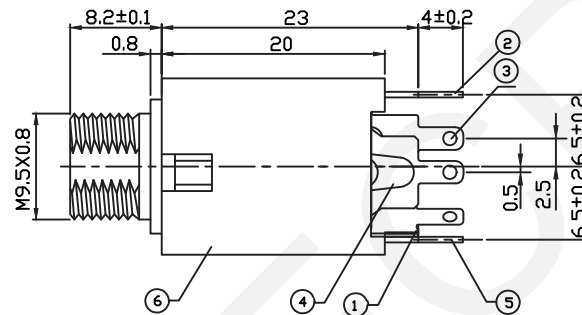

T:1.6 Dimensions of PC board holes
Tolerance :±0.1(Printed-top view)

Technical parameters:

Rated voltage: DC 30 V

Rated current: 0.5 A

Contact resistance: 0.03Ω, max

Insulation resistance: 100MΩ, min

Pressure: AC500V (50Hz) / 1minute

Insertion Force :2-20 N

Life: 50000 times

Operating Temperature:-30°C~70°C

Material:

WASHER :IRON

HOUSING :PA66

CURVE PIECE/NUT:C2680

CONTACT FOOT/SPRING:C5191

ORDER INFORMATION

RHTAYG6.3-004B A

6.3mm Stereo Jack Series

Schematic See Annex

RHTECP NINGBO RHT ELECTRONIC CO.,LTD


UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5

CHK'D BY FENG

APPR BY ZHAN

Stereo Jack Series

THIRD ANGLE PROJECTION



RHTAYG6.3-004B