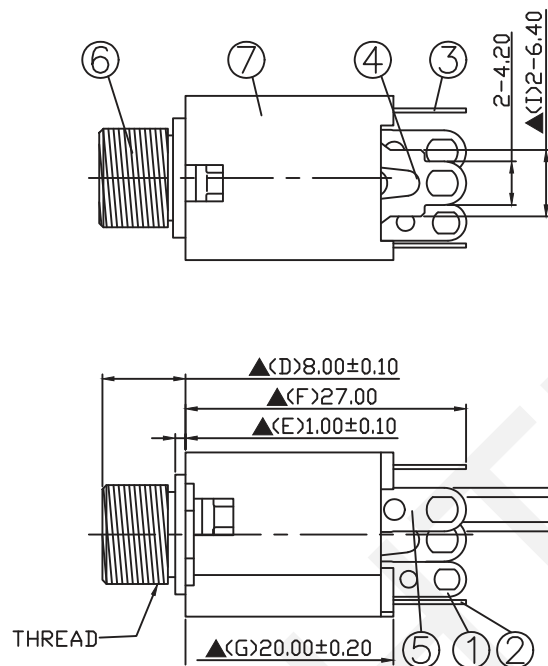
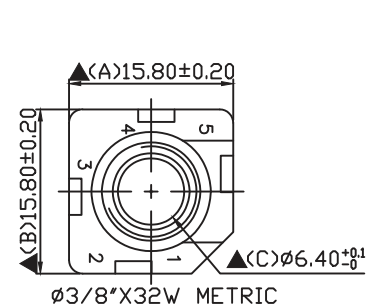



T:1.6 Dimensions of PC board holes
Tolerance :±0.1(Printed-top view)

Technical parameters:
Rated voltage: DC 30 V
Rated current: 0.5 A
Contact resistance: 0.03Ω, max
Insulation resistance: 100MΩ, min
Pressure: AC500V (50Hz) / 1minute
Insertion Force :2-20 N
Life: 50000 times
Operating Temperature:-30°C~70°C
Material:
WASHER :IRON
HOUSING :PA66
CURVE PIECE/NUT:C2680
CONTACT FOOT/SPRING:C5191

ORDER INFORMATION
RHTAYG6.3-004C A

6.3mm Stereo Jack Series
Schematic See Annex

004C	004CA	004CB	004CC	004CD	004CE

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm SHEET SIZE: A4 SCALE:---
0~3 3~18 18~50 50~120
±0.12 ±0.15 ±0.3 ±0.5


DRWN BY PAN

CHK'D BY FENG

APPR BY ZHAN

Stereo Jack Series

THIRD ANGLE PROJECTION



RHTAYG6.3-004C