
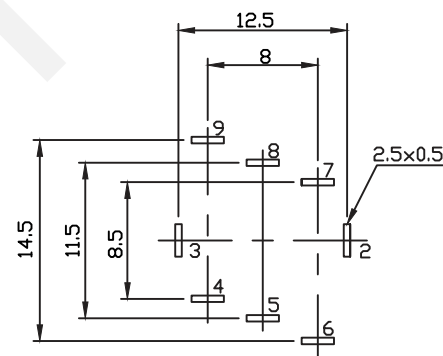
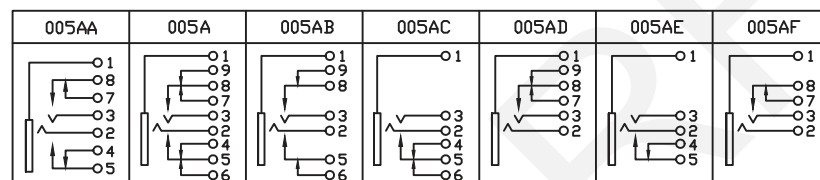
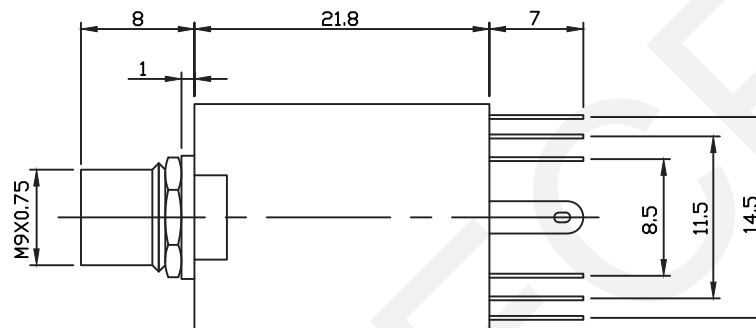


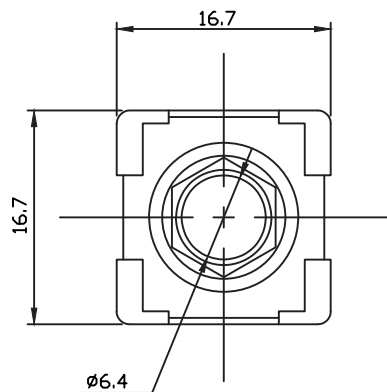

Technical parameters:
 Rated voltage: DC 30 V
 Rated current: 0.5 A
 Contact resistance: 0.03Ω, max
 Insulation resistance: 100MΩ, min
 Pressure: AC500V (50Hz) / 1minute
 Insertion Force :2-20 N
 Life: 50000 times
 Operating Temperature:-30°C~70°C
 Material:
 WASHER :IRON
 Ring Spring: C5191
 Bushing-1/Housing: ABS
 Nut/Bushing-2/Shunt Terminal/
 Earth Terminal:C2680

ORDER INFORMATION
 RHTAYG6.3-005A A

6.3mm Stereo Jack Series
 Schematic See Annex

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	

Stereo Jack Series	
THIRD ANGLE PROJECTION	RHTAYG6.3-005A