
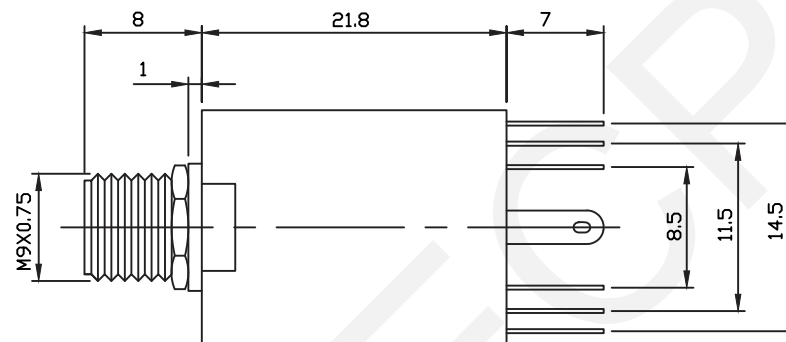


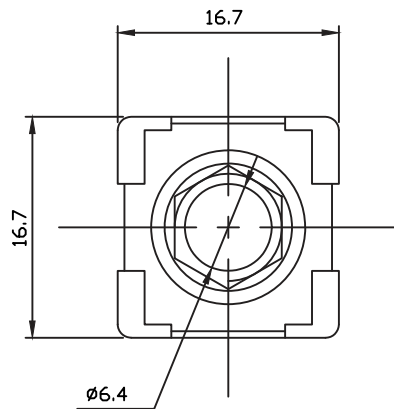

Technical parameters:

Rated voltage: DC 30 V

Rated current: 0.5 A

Contact resistance: 0.03Ω, max

Insulation resistance: 100MΩ, min

Pressure: AC500V (50Hz) / 1minute

Insertion Force :2-20 N

Life: 50000 times

Operating Temperature:-30°C~70°C

Material:

WASHER :IRON

Ring Spring: C5191

Bushing-1/Housing: ABS

Nut/Bushing-2/Shunt Terminal/


Earth Terminal:C2680

ORDER INFORMATION

RHTAYG6.3-005B A

6.3mm Stereo Jack Series

Schematic See Annex

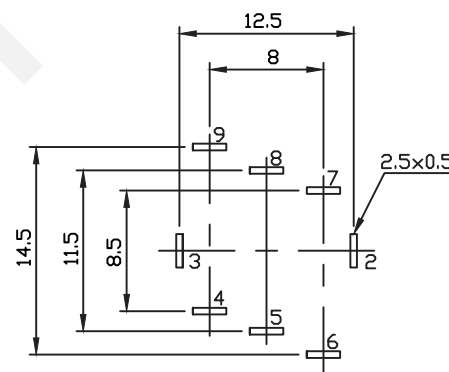

005BA	005B	005BB	005BC	005BD	005BE	005BF

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

Stereo Jack Series

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION


±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



RHTAYG6.3-005B