

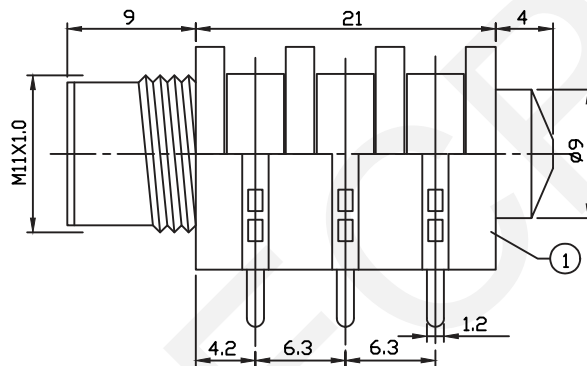
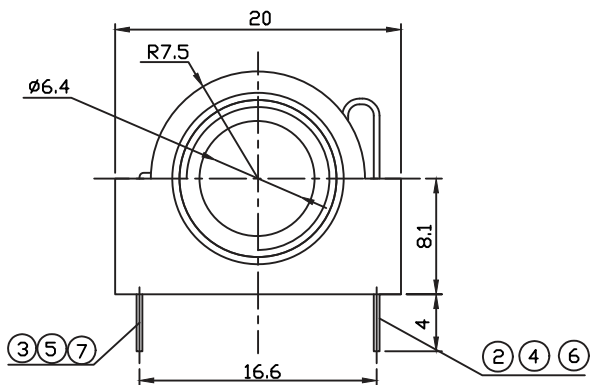


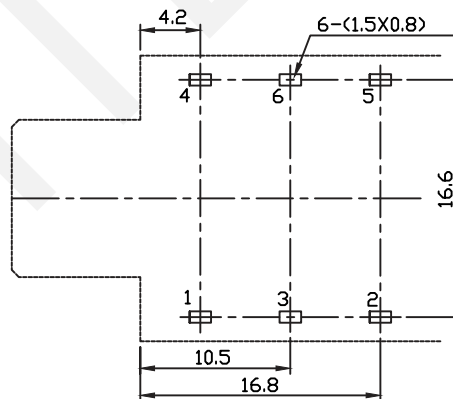

Technical parameters:
 Rated voltage: DC 30 V
 Rated current: 0.5 A
 Contact resistance: 0.03Ω, max
 Insulation resistance: 100MΩ, min
 Pressure: AC500V (50Hz) / 1minute
 Insertion Force :2-20 N
 Life: 50000 times
 Operating Temperature:-30°C~70°C
 Material:
 Housing : PC
 Contact foot : Brass
 Spring : Phosrhor Bronze

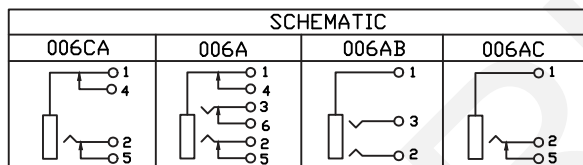

T1.6 Dimensions of PC board holes
 Tolerance :±0.1(Printed-top view)

ORDER INFORMATION
 RHTAYG6.3-006C A

6.3mm Stereo Jack Series
 Schematic See Annex

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5
			CHK'D BY FENG
			APPR BY ZHAN

Stereo Jack Series

THIRD ANGLE PROJECTION



RHTAYG6.3-006C