


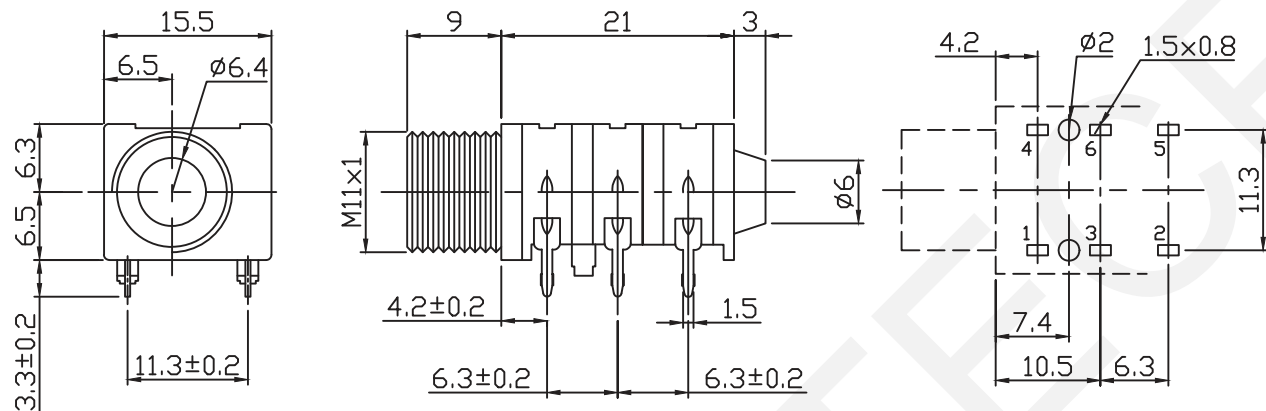

Technical parameters:  
 Rated voltage: DC 30 V  
 Rated current: 0.5 A  
 Contact resistance: 0.03 $\Omega$ , max  
 Insulation resistance: 100M $\Omega$ , min  
 Pressure: AC500V (50Hz) / 1minute  
 Insertion Force :2-20 N  
 Life: 50000 times  
 Operating Temperature:-30°C~70°C  
 Material:  
 Housing: PC  
 Contact foot: Bronze

| 007A | 007AA | 007AB | 007AC | 007AD | 007AE |
|------|-------|-------|-------|-------|-------|
|      |       |       |       |       |       |

#### ORDER INFORMATION

RHTAYG6.3-007A A

6.3mm Stereo Jack Series  
 Schematic See Annex

**RHTECP** NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

Stereo Jack Series

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION


±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



RHTAYG6.3-007A