
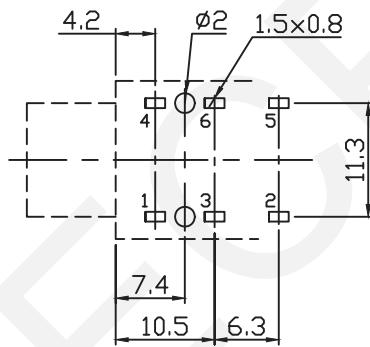
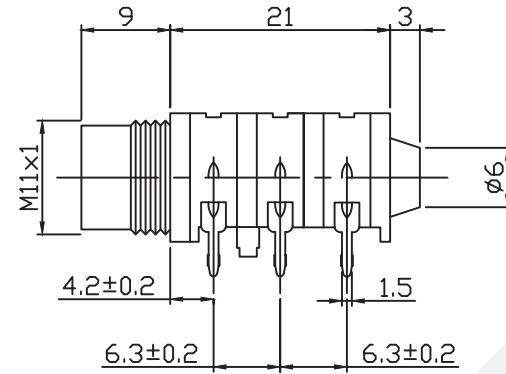


1 2 3 4 5 6 7 8 9


A

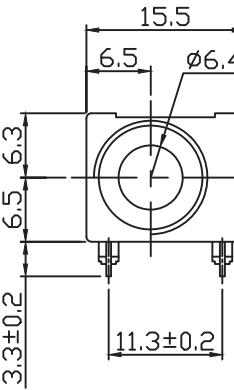

B

Technical parameters:  
 Rated voltage: DC 30 V  
 Rated current: 0.5 A  
 Contact resistance: 0.03Ω, max  
 Insulation resistance: 100MΩ, min  
 Pressure: AC500V (50Hz) / 1 minute  
 Insertion Force: 2-20 N  
 Life: 50000 times  
 Operating Temperature: -30°C~70°C  
 Material:  
 Housing: PC  
 Contact foot: Bronze

C

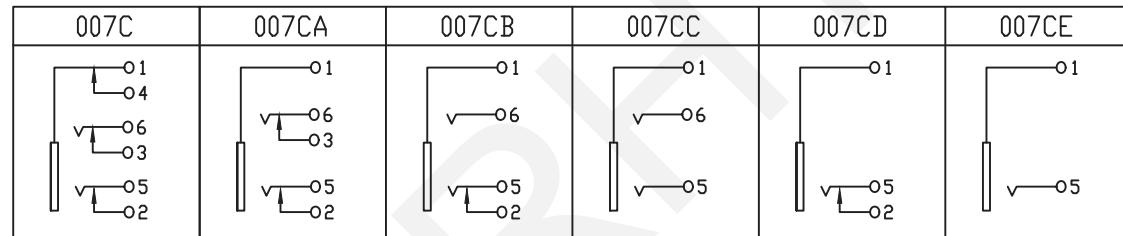

#### ORDER INFORMATION

RHTAYG6.3-007C A

6.3mm Stereo Jack Series

Schematic See Annex

D

E

F

G

RHTECP® NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	APPR BY ZHAN
±0.12	±0.15	±0.3	±0.5		

Stereo Jack Series



RHTAYG6.3-007C

1 2 3 4 5 6 7 8 9

A

B

C

D

E

F

G