
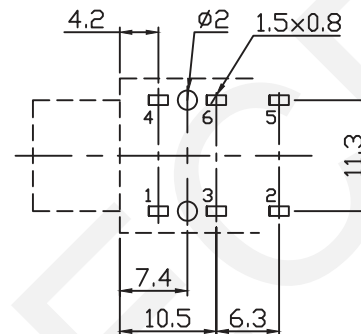
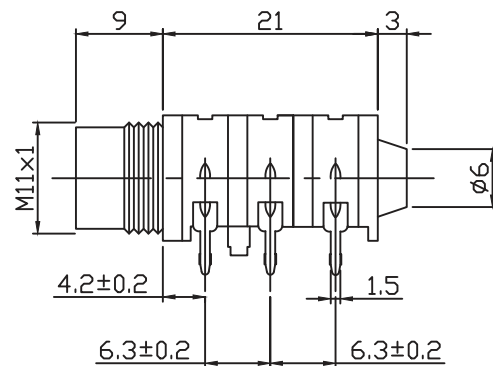


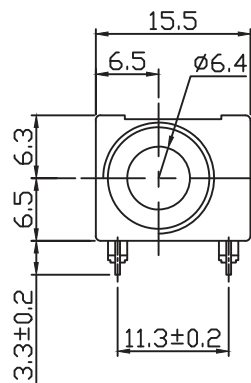

Technical parameters:
 Rated voltage: DC 30 V
 Rated current: 0.5 A
 Contact resistance: 0.03Ω, max
 Insulation resistance: 100MΩ, min
 Pressure: AC500V (50Hz) / 1minute
 Insertion Force :2-20 N
 Life: 50000 times
 Operating Temperature:-30°C~70°C
 Material:
 Housing: PC
 Contact foot: Bronze

007H	007HA	007HB	007HC	007HD	007HE

ORDER INFORMATION

RHTAYG6.3-007H A

6.3mm Stereo Jack Series
 Schematic See Annex

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

Stereo Jack Series

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



RHTAYG6.3-007H