

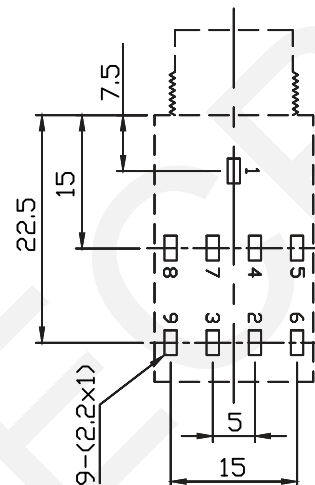
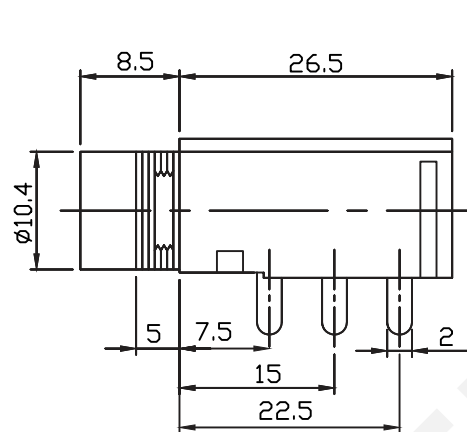


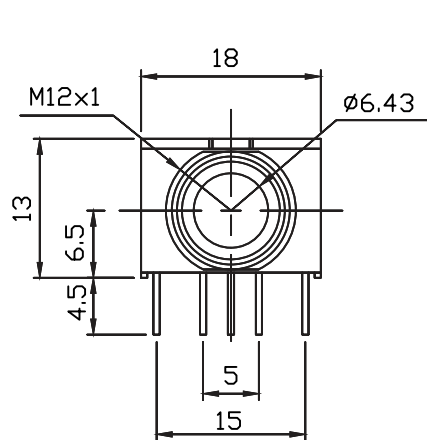

Technical parameters:
 Contact resistance: 0.03Ω, max
 Insulation resistance: 100MΩ, min
 Rated Load: DC 50V 1A
 Withstand voltage:
 500V AC / 1 minute/50Hz
 Insertion Force :5-40 N
 Life: 5000 times
 Operating Temperature:-30°C~70°C
 Material:
 Housing: PC
 Contacts: copper

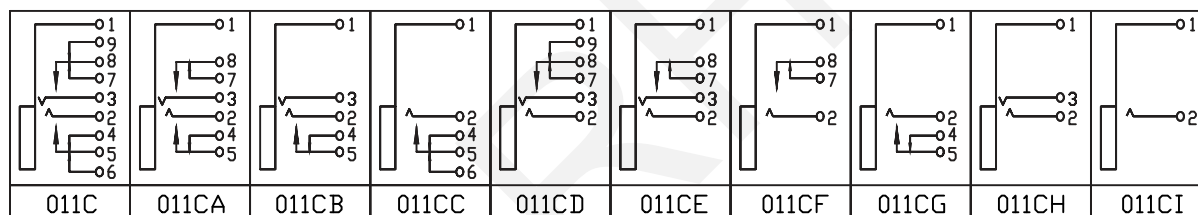

ORDER INFORMATION
 RHTAYG6.3-011C A

6.3mm Stereo Jack Series
 Schematic: See Annex

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5

CHK'D BY FENG
 APPR BY ZHAN

Stereo Jack Series
 THIRD ANGLE PROJECTION
 RHTAYG6.3-011C