
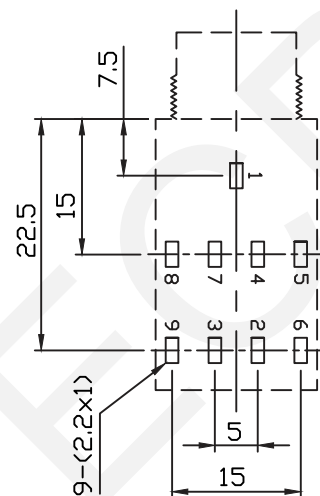
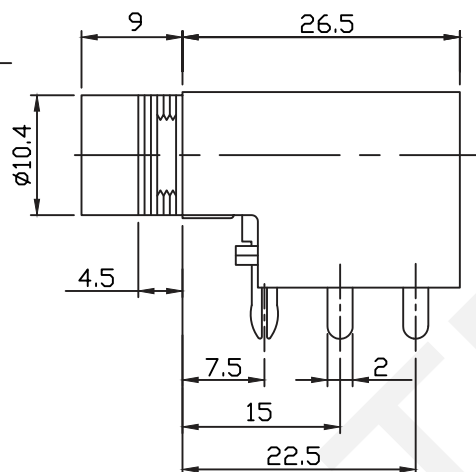


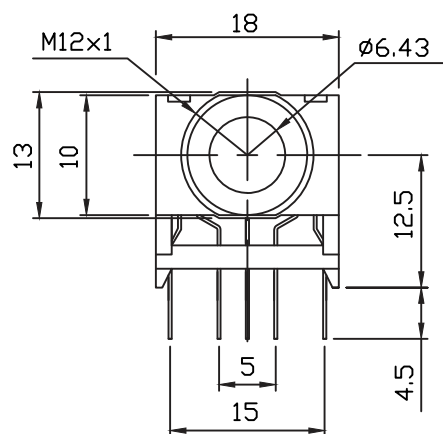

Technical parameters:

Contact resistance: 0.03Ω , max

Insulation resistance: 100M Ω , min

Rated Load: DC 50V 1A

Withstand voltage:

500V AC / 1 minute/50Hz

Insertion Force :5-40 N


Life: 5000 times

Operating Temperature: -30°C~70°C

Material:

Housing: PC

Contacts: copper

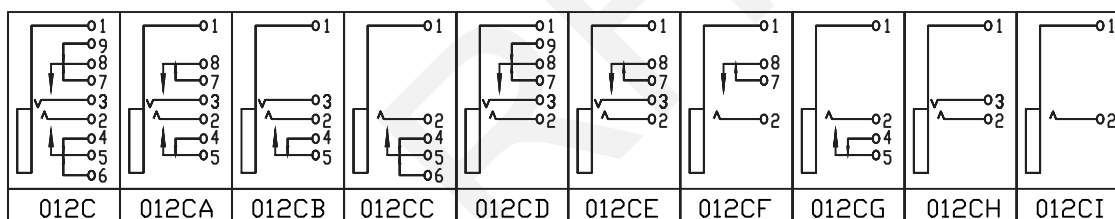

ORDERINFORMATION

RHTAYG6.3-012C A

6.3mm Stereo Jack Series

Schematic: See Annex