


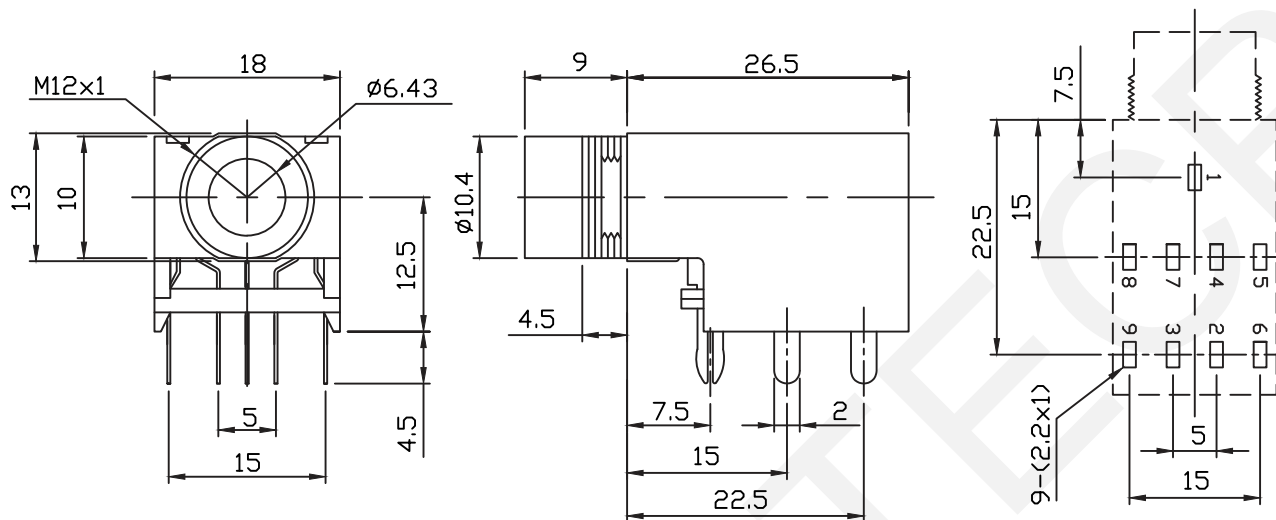

Technical parameters:

Contact resistance: 0.03Ω, max

Insulation resistance: 100MΩ, min

Rated Load: DC 50V 1A

Withstand voltage:

500V AC / 1 minute/50Hz

Insertion Force :5-40 N


Life: 5000 times

Operating Temperature:-30°C~70°C

Material:

Housing: PC

Contacts: copper

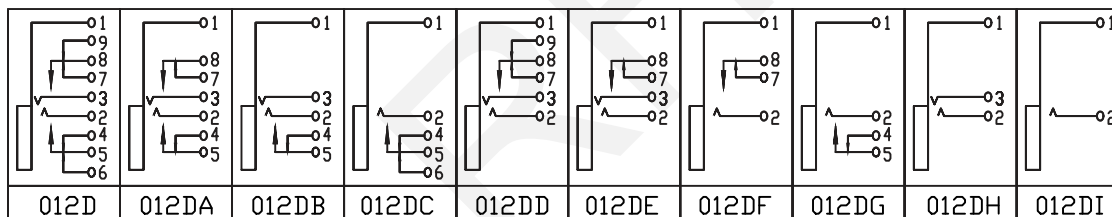

ORDER INFORMATION

RHTAYG6.3-012D A

6.3mm Stereo Jack Series

Schematic: See Annex

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

Stereo Jack Series

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

RHTAYG6.3-012D

±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



1

2

3

4

5

6

7

8

9