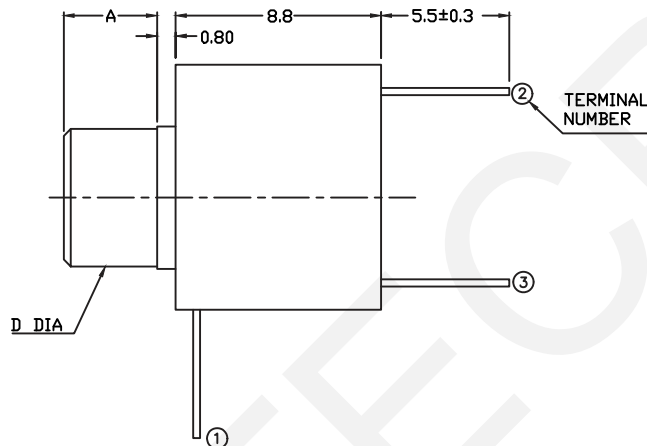
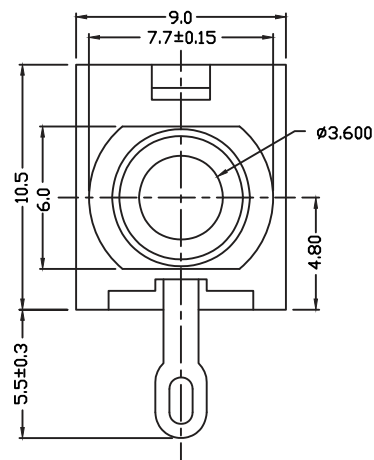


Ø3.5 MATE PLUG

MODEL NO	001B	001BA	001BB
D DIA	Without NUT	Without NUT	Without NUT
	Ø6.0	Ø6.0	Ø6.0
A	3.00mm	3.00mm	3.00mm
SCHEMATIC			

Technical Parameters:
 Rated Voltage:DC 30V
 Rated Current: 0.5 A
 Contact Resistance:0.03Ω,Max
 Insulation Resistance:100MΩ,Min
 Pressure:AC500V(50Hz)/1minute
 Insertion Force:2-20 N
 Life: 50000 Times
 Operating Temperature:-30°C~70°C
 Material:
 Housing Material:PBT
 Center Pin Material:
 Terminal 1 :Brass
 Terminal 2 :Copper Alloy
 Terminal 3 :Brass
 Bushing :Brass

ORDER INFORMATION

RHTAYG3.5-001B A

3.5mm Dip Mono Jack

A:With NUT B:Without NUT

Schematic See Annex :

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

Dip Mono Jack

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION


±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



RHTAYG3.5-001B