
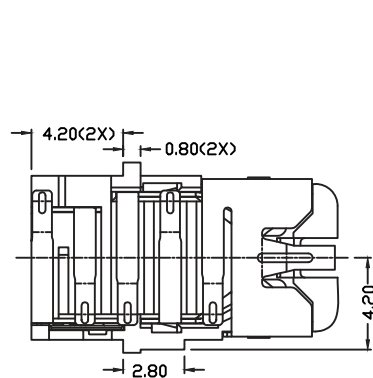
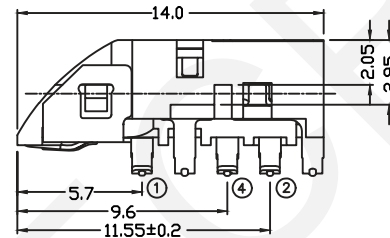

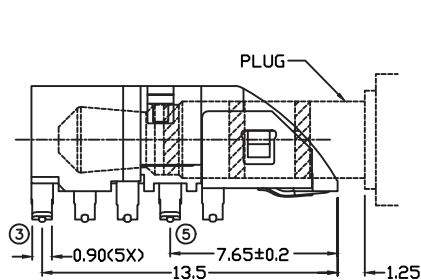
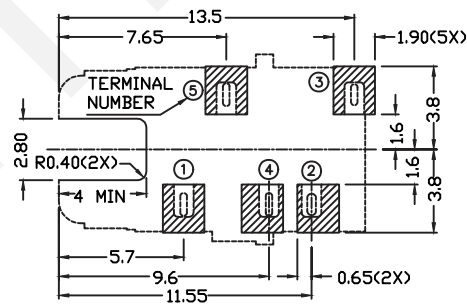


Ø3.5 MATE PLUG

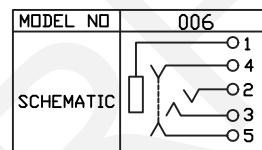

PCB LAYOUT
(TOP VIEW)

Technical Parameters:
 Rated Voltage: DC 30V
 Rated Current: 0.5 A
 Contact Resistance: 0.03Ω, Max
 Insulation Resistance: 100MΩ, Min
 Pressure: AC500V(50Hz)/1minute
 Insertion Force: 2-20 N
 Life: 50000 Times
 Operating Temperature: -30°C~70°C

Material:
 Terminal 1 : Copper Alloy
 Terminal 2 : Copper Alloy
 Terminal 3 : Copper Alloy
 Terminal 4 : Copper Alloy
 Terminal 5 : Copper Alloy
 Spring : Copper Alloy
 Housing : PA6T

ORDER INFORMATION
 RHTAYSJ3.5-006

3.5mm Dip Stereo Jack

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5
			CHK'D BY FENG
			APPR BY ZHAN

Dip Stereo Jack	
THIRD ANGLE PROJECTION	RHTAYSJ3.5-006