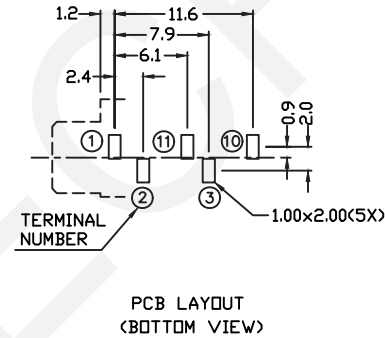

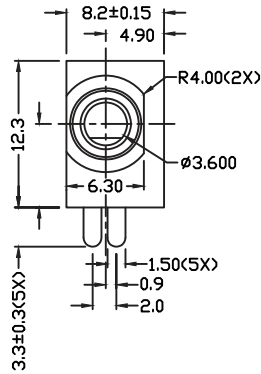



Without NUT	Ø6.0	MODEL NO	008CB	008CBA	008CBB	008CBC	008CBD
D DIA		SCHEMATIC					

Technical Parameters:
 Rated Voltage:DC 30V
 Rated Current: 0.5 A
 Contact Resistance:0.03Ω,Max
 Insulation Resistance:100MΩ,Min
 Pressure:AC500V(50Hz)/1minute
 Insertion Force:2-20 N
 Life: 50000 Times
 Operating Temperature:-30°C~70°C

Material:
 Housing Cover : PBT
 Center Pin Material:
 Spring : Stainless Steel
 Terminal 1 2 3 10 11 : Brass
 Bushing : Brass

ORDER INFORMATION

RHTAYSJ3.5-008CB A

3.5mm Dip Stereo Jack

A:With NUT B:Without NUT

Schematic:See Annex


RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5

CHK'D BY FENG
 APPR BY ZHAN

Dip Stereo Jack

THIRD ANGLE PROJECTION



RHTAYSJ3.5-008CB