
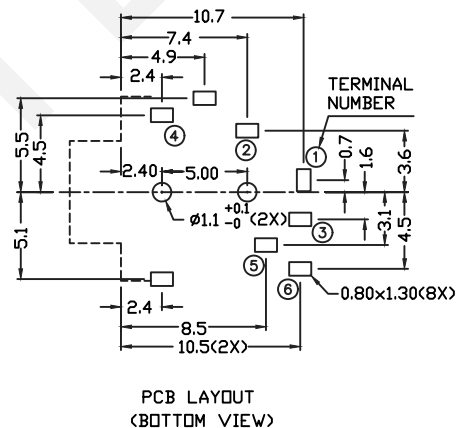



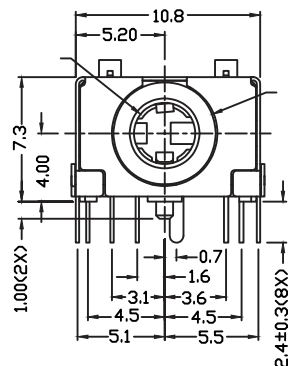


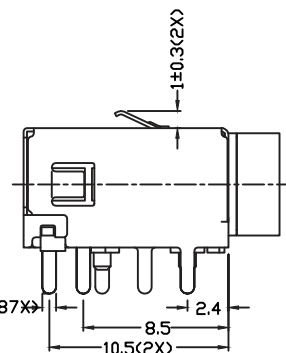

MODEL NO	010	010A
SCHEMATIC		

Technical Parameters:
 Rated Voltage:DC 30V
 Rated Current: 0.5 A
 Contact Resistance:0.03Ω,Max
 Insulation Resistance:100MΩ,Min
 Pressure:AC500V(50Hz)/1minute
 Insertion Force:2~20 N
 Life: 50000 Times
 Operating Temperature:-30℃~70℃
 Material:
 Terminal 1 : Copper Alloy
 Terminal 2 : Copper Alloy
 Terminal 3 : Copper Alloy
 Terminal 4 : Copper Alloy
 Terminal 5 : Copper Alloy
 Terminal 6 : Copper Alloy
 Shield : Copper Alloy
 Housing : Pa66
 Bushing : Brass

ORDER INFORMATION
 RHTAYSJ3.5-010A

3.5mm Dip Stereo Jack
 Schematic:See Annex

RHTECP® NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5
			CHK'D BY FENG
			APPR BY ZHAN

Dip Stereo Jack	
THIRD ANGLE PROJECTION	RHTAYSJ3.5-010