
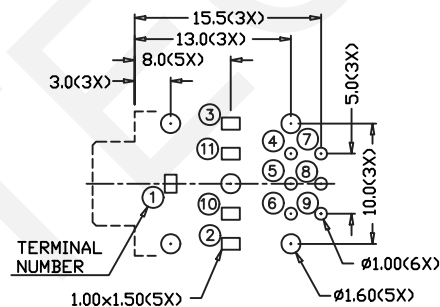


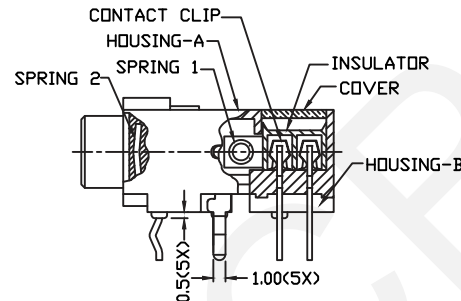





PCB LAYOUT
(BOTTOM VIEW)

Technical Parameters:
 Rated Voltage:DC 30V
 Rated Current: 0.5 A
 Contact Resistance:0.03Ω,Max
 Insulation Resistance:100MΩ,Min
 Pressure:AC500V(50Hz)/1minute
 Insertion Force:2-20 N
 Life: 50000 Times
 Operating Temperature:-30°C~70°C
 Material:
 Housing-A/B,Cover : PBT
 Terminal 1 : Cold Rolled Steel
 Terminal 2,3 : Copper Alloy
 Spring 1 : Stainless Steel
 Spring 2 : Copper Alloy
 Bushing : Brass
 Insulator : Pa66
 Contact Clip : C521QR-EH AG CLAD
 Terminal 4,5,6,7,8,9,10,11 : Brass

With NUT	MODEL NO	010A	010AA	010AB	010AC	010AD
D DIA	SCHEMATIC					

ORDER INFORMATION

RHTAYSJ3.5-010A A

3.5mm Dip Stereo Jack

A:With NUT B:Without NUT

Schematic:See Annex

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5
CHK'D BY FENG			
APPR BY ZHAN			

Dip Stereo Jack	
THIRD ANGLE PROJECTION	RHTAYSJ3.5-010A