
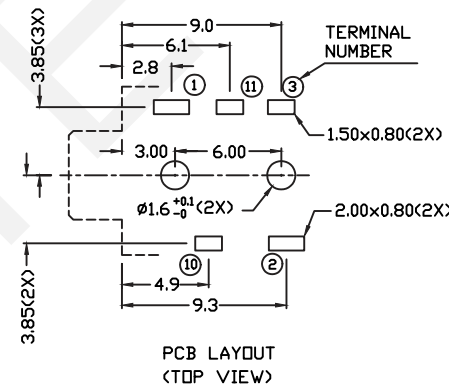


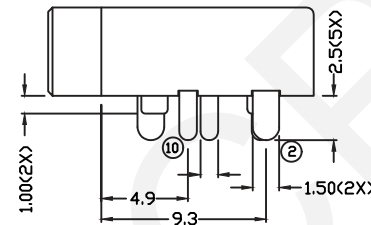
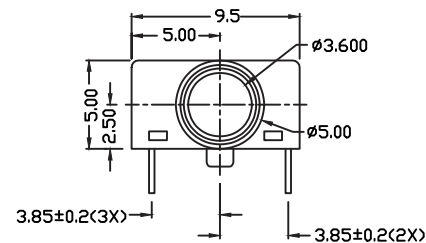




Technical Parameters:

Rated Voltage:DC 30V

Rated Current: 0.5 A

Contact Resistance:0.03Ω,Max

Insulation Resistance:100MΩ,Min

Pressure:AC500V(50Hz)/1minute

Insertion Force:2-20 N

Life: 50000 Times

Operating Temperature:-30°C~70°C

Material:

Terminal 1 : Copper Alloy

Terminal 2 : Copper Alloy

Terminal 3 : Copper Alloy

Terminal 10 : Brass

Terminal 11 : Brass

Housing : Pa66

Cover : Pa66

| MODEL NO  | 012 | 012A | 012B | 012C | 012D |
|-----------|-----|------|------|------|------|
| SCHEMATIC |     |      |      |      |      |

ORDER INFORMATION

RHTAYSJ3.5-012A

3.5mm Dip Stereo Jack

Schematic:See Annex

RHTECP® NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

Dip Stereo Jack

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION


±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



RHTAYSJ3.5-012