

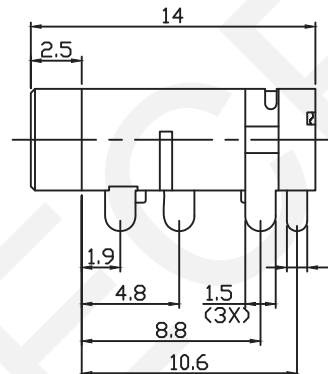






| MODEL NO  | 014B | 014A | 014 |
|-----------|------|------|-----|
| SCHEMATIC |      |      |     |

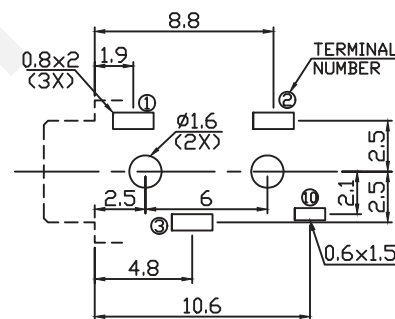

PCB LAYOUT  
(TOP VIEW)

Technical Parameters:  
 Rated Voltage: DC 30V  
 Rated Current: 0.5 A  
 Contact Resistance: 0.03Ω, Max  
 Insulation Resistance: 100MΩ, Min  
 Pressure: AC500V(50Hz)/1minute  
 Insertion Force: 2~20 N  
 Life: 50000 Times  
 Operating Temperature: -30°C~70°C  
 Material:  
 Terminal 1 : Copper Alloy  
 Terminal 2 : Copper Alloy  
 Terminal 3 : Copper Alloy  
 Terminal 10 : Brass  
 Housing : Pa66

#### ORDER INFORMATION

RHTAYSJ3.5-014A

3.5mm Dip Stereo Jack  
 Schematic: See Annex


**RHTECP** NINGBO RHT ELECTRONIC CO.,LTD

| UNITS:mm | SHEET SIZE: A4 | SCALE:--- | DRWN BY PAN |
|----------|----------------|-----------|-------------|
| 0~3      | 3~18           | 18~50     | 50~120      |
| ±0.12    | ±0.15          | ±0.3      | ±0.5        |

CHK'D BY FENG  
 APPR BY ZHAN

Dip Stereo Jack

THIRD ANGLE PROJECTION



RHTAYSJ3.5-014