
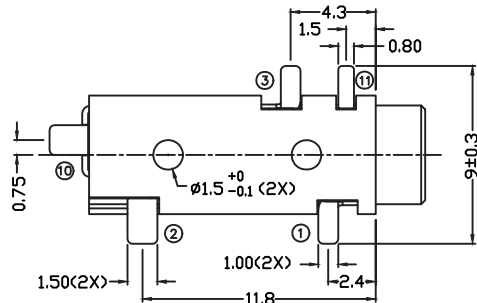
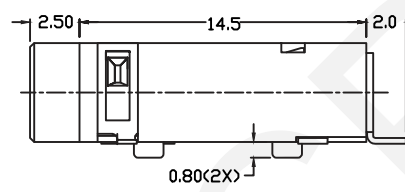

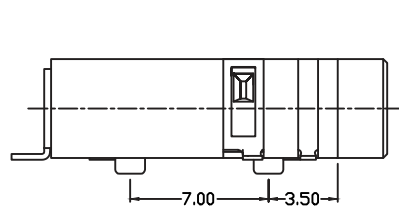


Ø3.5 MATE PLUG

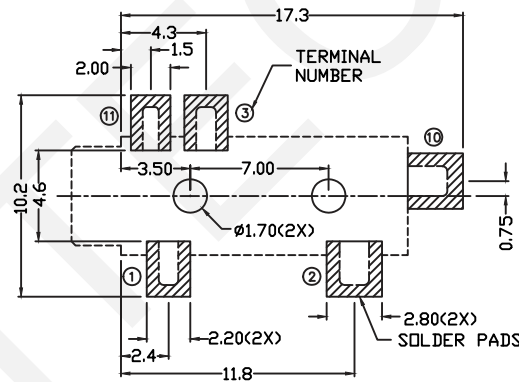

RECOMMENDED
SOLDER PAD LAYOUT

MODEL NO	002	002A	002B	002C	002D
SCHEMATIC					

Technical Parameters:
 Rated Voltage:DC 30V
 Rated Current: 0.5 A
 Contact Resistance:0.03Ω,Max
 Insulation Resistance:100MΩ,Min
 Pressure:AC500V(50Hz)/1minute
 Insertion Force:2-20 N
 Life: 50000 Times
 Operating Temperature:-30°C~70°C
 Material:
 Terminal 1 : Copper Alloy
 Terminal 2 : Copper Alloy
 Terminal 3 : Copper Alloy
 Terminal 10 : Brass
 Terminal 11 : Brass
 Housing : Pa66

ORDER INFORMATION
 RHTAY20PJ3.5-002A

3.5mm SMD Stereo Jack
 Schematic:See Annex

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5
			CHK'D BY FENG
			APPR BY ZHAN

SMD Stereo Jack	
THIRD ANGLE PROJECTION	RHTAY20PJ3.5-002