

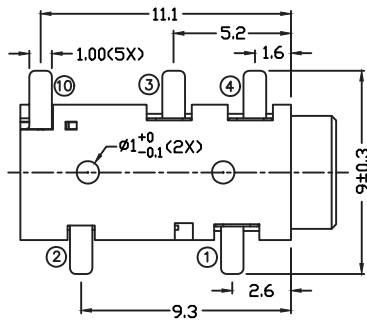





A DETAIL COPLANARITY



Ø3.5 MATE PLUG

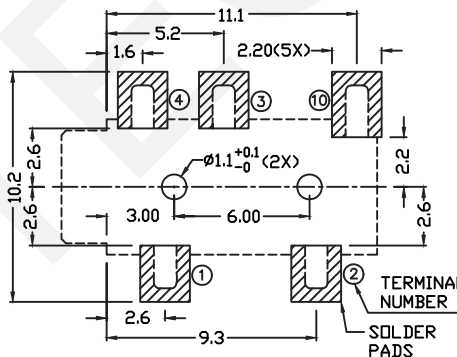

RECOMMENDED
SOLDER PAD LAYOUT

MODEL NO	007	007A	007B	007C	007D
SCHEMATIC					

Technical Parameters:

Rated Voltage:DC 30V

Rated Current: 0.5 A

Contact Resistance:0.03Ω,Max

Insulation Resistance:100MΩ,Min

Pressure:AC500V(50Hz)/1minute

Insertion Force:2~20 N

Life: 50000 Times

Operating Temperature:-30°C~70°C

Material:

Terminal 1 : Copper Alloy

Terminal 2 : Copper Alloy

Terminal 3 : Copper Alloy

Terminal 10 : Brass

Housing : PA6T

ORDER INFORMATION

RHTAY20PJ3.5-007A

3.5mm SMD Stereo Jack

Schematic:See Annex

RHTECP® NINGBO RHT ELECTRONIC CO.,LTD


UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5

CHK'D BY FENG

APPR BY ZHAN

SMD Stereo Jack

THIRD ANGLE PROJECTION



RHTAY20PJ3.5-007